

# TRUCK & BUS TYRE CATALOG

LONG HAUL | REGIONAL | MIXED SERVICE | URBAN | WINTER

General Version







COMPANY INTRODUCTION

**TOP 9**

No. 9 of Top 75 Global Tyre Manufacturers

**SINCE 1958**

Established in Year 1958

**30,000 EMPLOYEES**

Support from Over 30,000 Employees

**200 MARKETS**

Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.

Most Advanced  
Equipment

Best  
Raw Material

Leanest  
Management

Latest  
Technology

Least  
Energy Consumption

Most Suitable  
Products

COMPANY MISSION

WE ARE COMMITTED TO  
ADVANCING TOWARDS  
FUTURE MOBILITY

COMPANY VISION

TO BE A GLOBAL LEADING  
TYRE MANUFACTURER



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia




BIS Certification of India



INMETRO Certification of Brazil




GLOBAL BRANCHES & SUBSIDIARIES

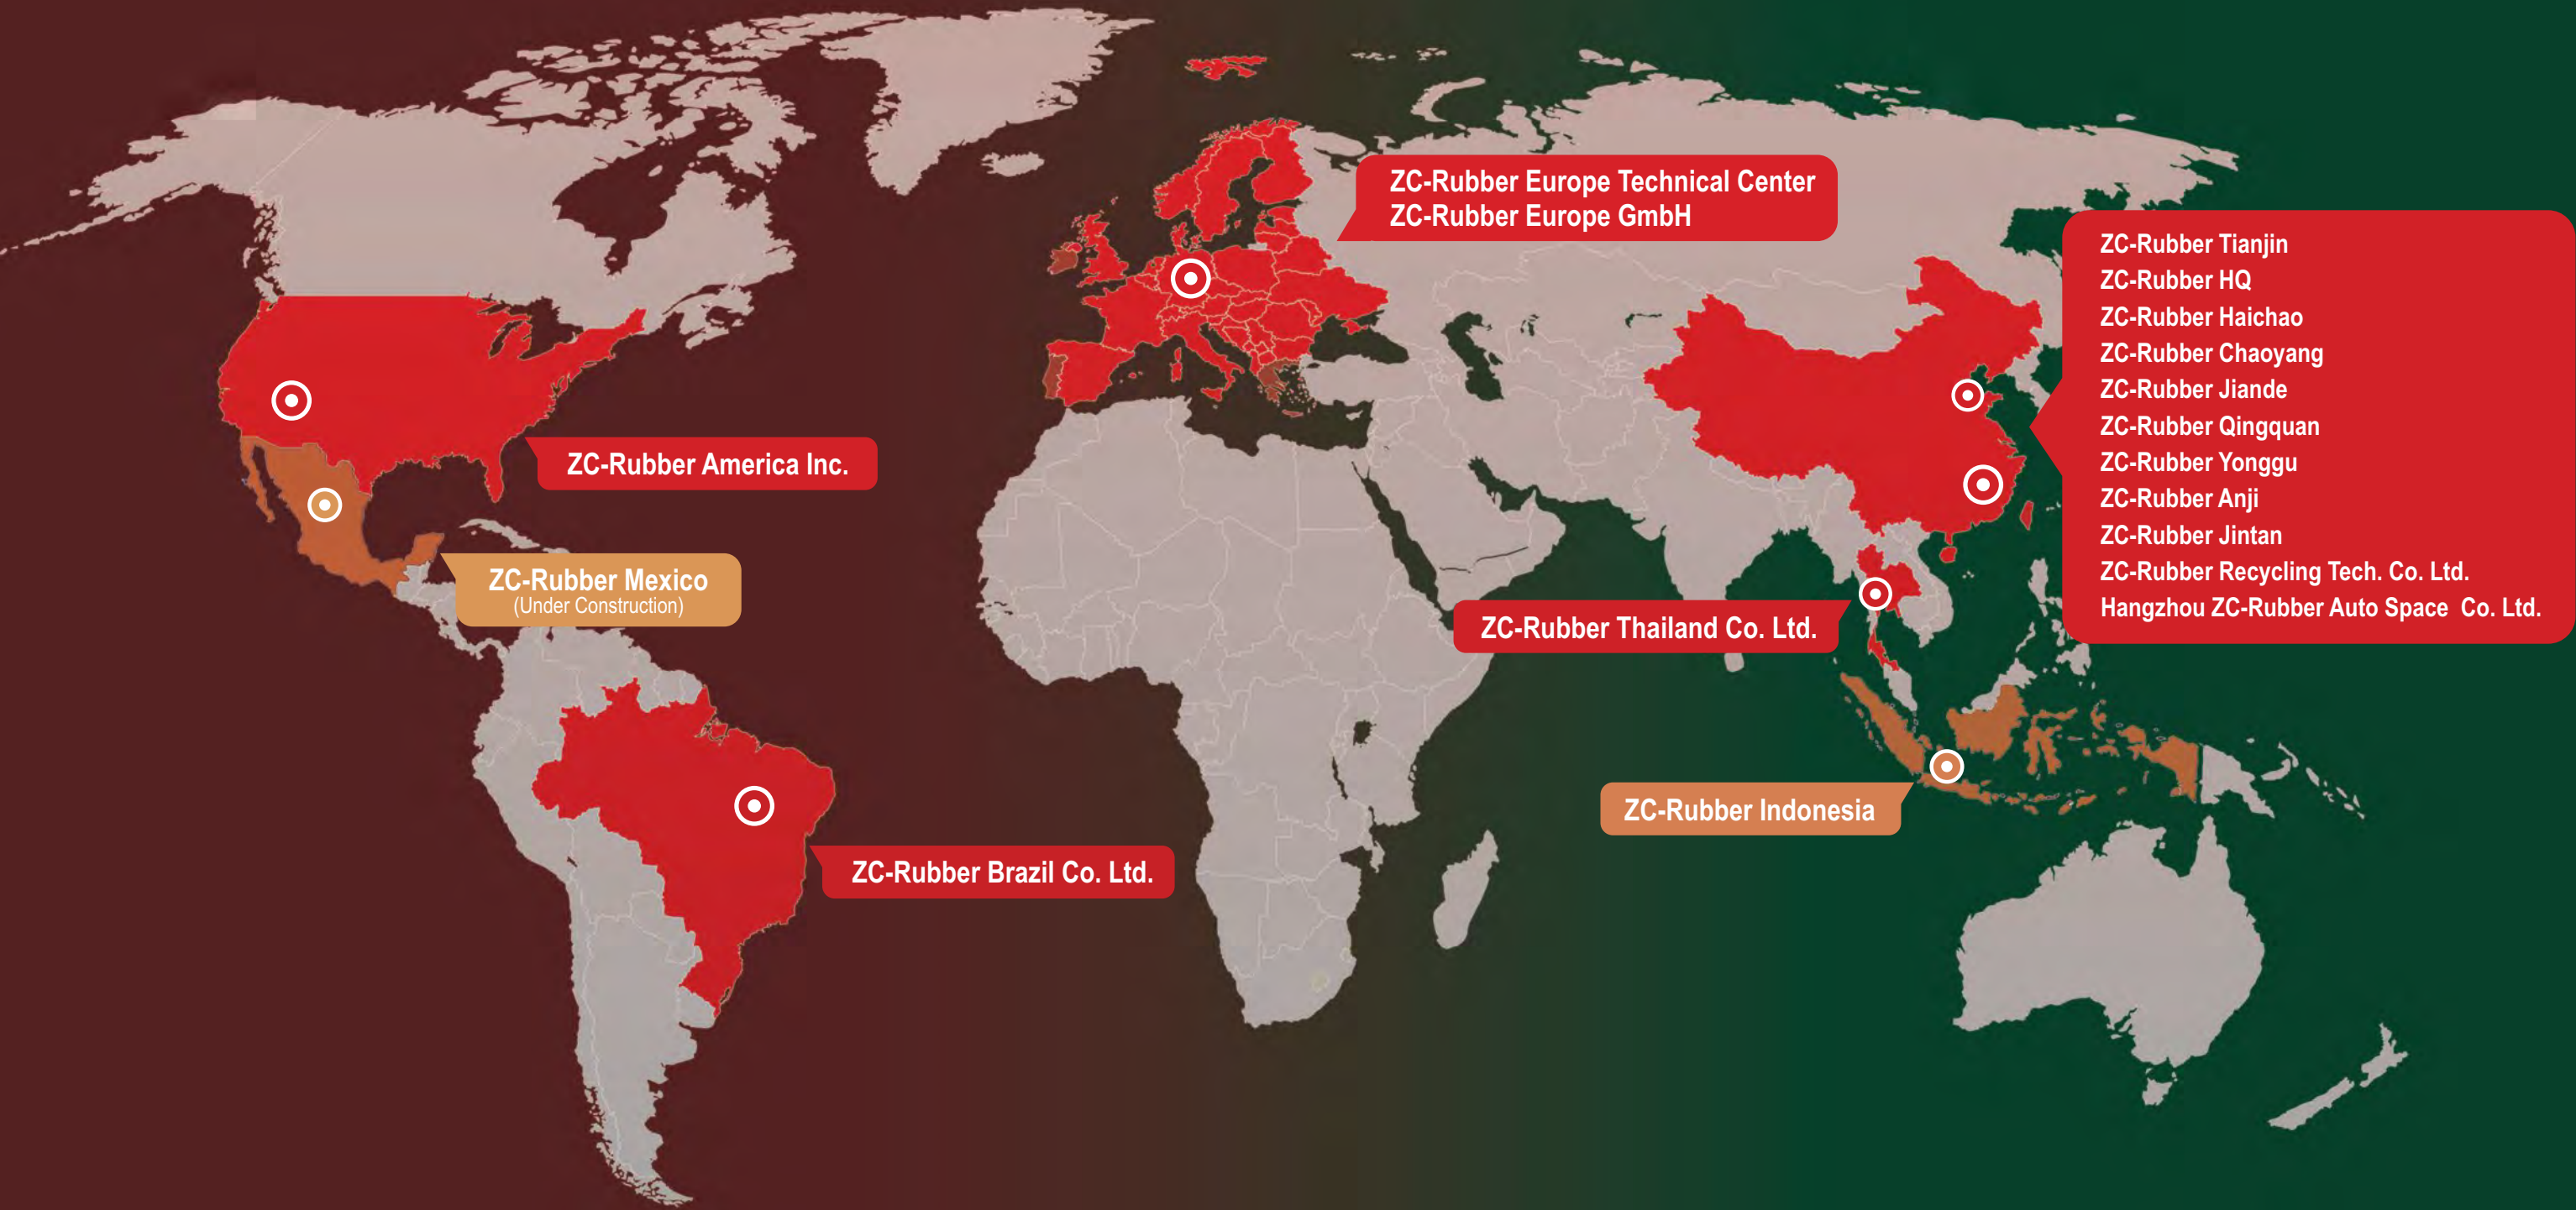



## STRATEGIC COOPERATION

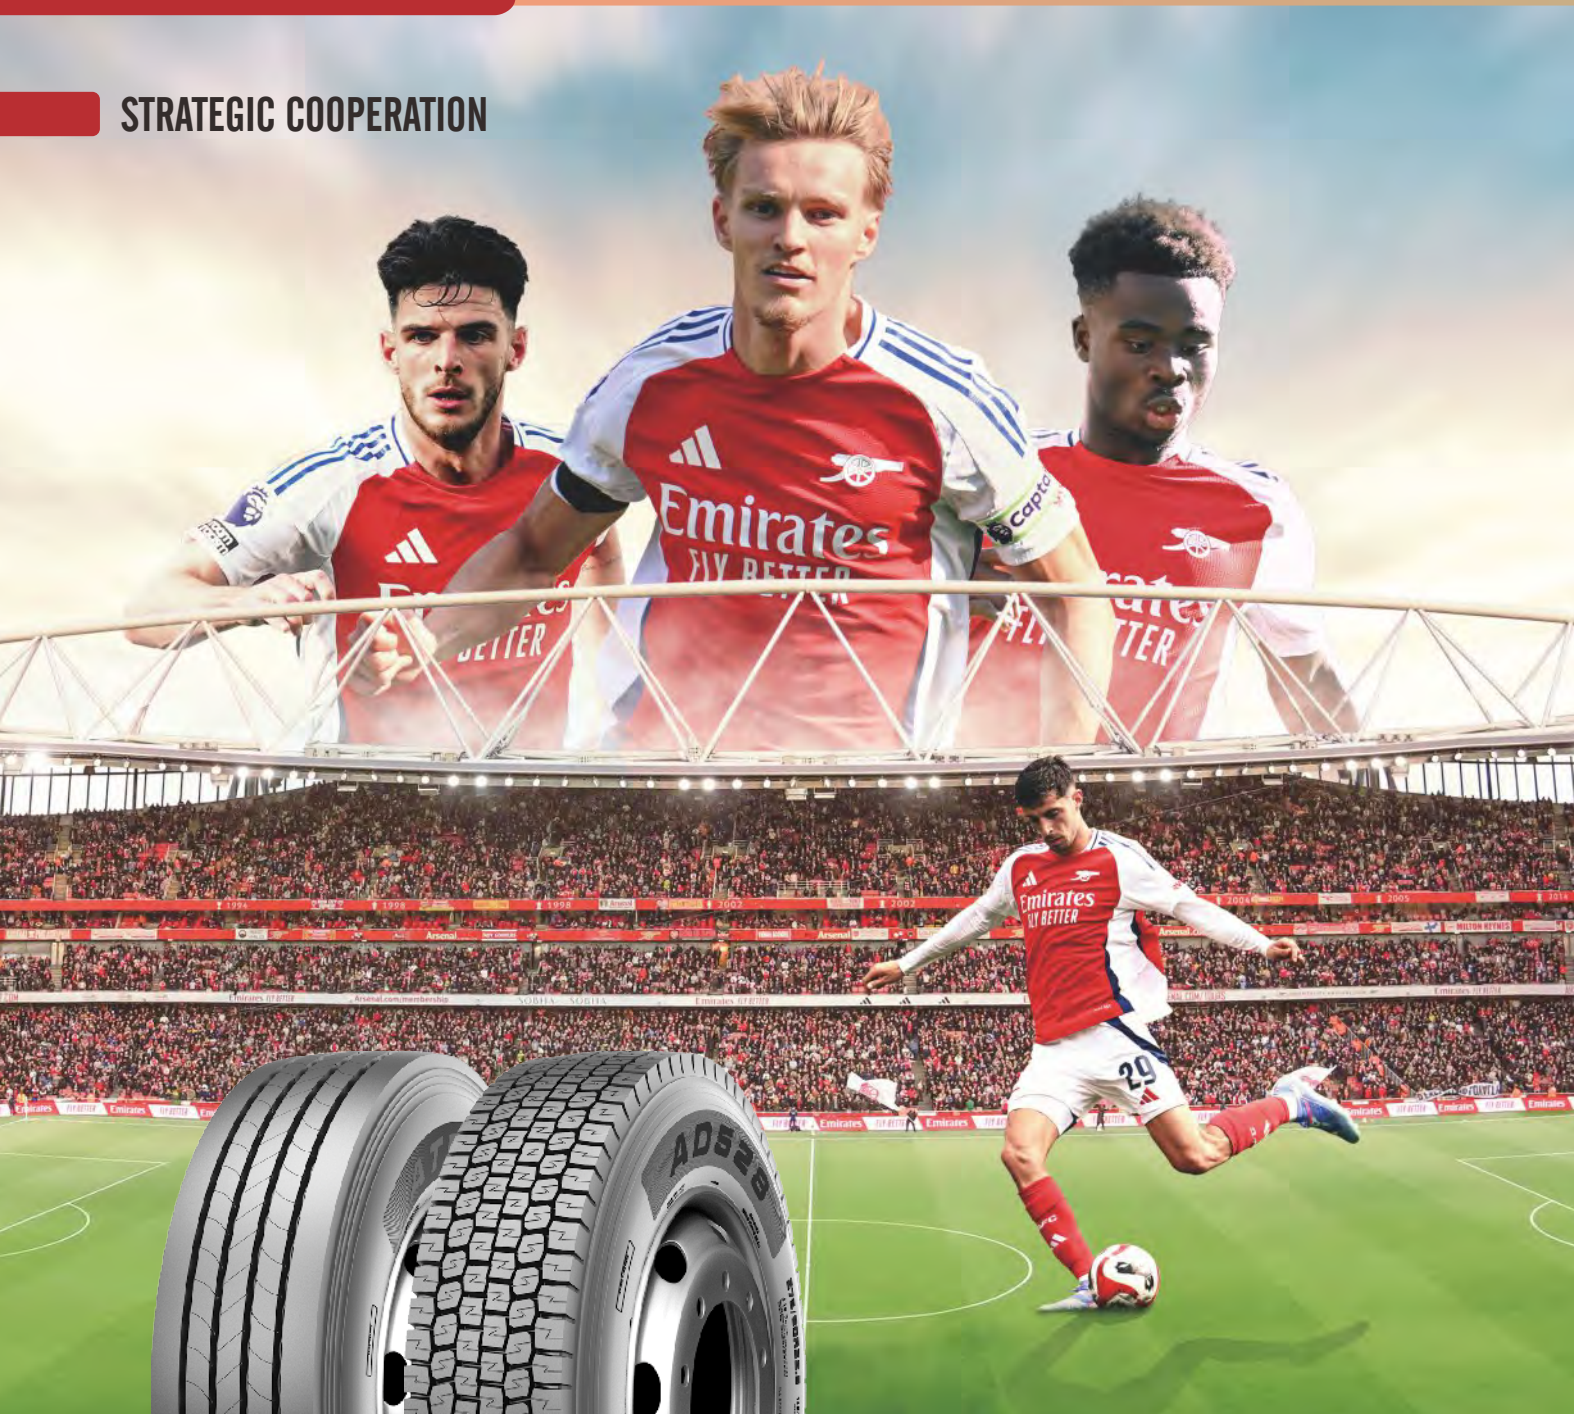

## OE CUSTOMERS



## KEY ACCOUNTS



## KEY SUPPLIERS



OFFICIAL GLOBAL PARTNER OF ARSENAL FOOTBALL CLUB

# ALWAYS MOVING FORWARD





## Pre-Strain Contour Theory (PSCT)

Minimized tyre profile deformation



After more than 20 years of painstaking research, ZC-Rubber TBR Research Center has finally successfully developed the Pre-strain Contour theory (PSCT) and four technologies derived from this theory with independent

intellectual property rights. In 2020, the newly launched ZC-Rubber premium truck and bus tyres based on the theories and technologies have been recognized by the market.

- Tyre Simulation of Pre-stressing Force through FEA (Finite Elements Analysis)
- Simulation Iteration based on pre-set tyre profile
- Minimized tyre profile deformation when inflated

Pre-strain Contour Theory is a new truck and bus tyre design theory developed by ZC-Rubber. We conducted the simulation of real tyre performance under different scenarios and conditions of various commercial vehicle


models. Based on the new theory and core technologies, the tyre can achieve minimized profile deformation and heat generation when inflated and loaded, which greatly improves its tyre life and overall performance.

## BTCT

Belt Tension Control Technology (BTCT) - Enhanced tyre life and durability


- Reduced shear force among steel belts
- Tension improved at the end of belts but reduced at the center
- Reduced deformation at the end of belts at high speed

BTCT means Belt Tension Control Technology. Based on PSCT, the shear force among steel belts is greatly reduced. It improves the tension at the end of belts but reduces the tension at the center, thus ensuring the minimized tyre deformation at high speed. This features the crown with low heat generation and high strength, bringing a 20% improvement in durability and longer tyre life.

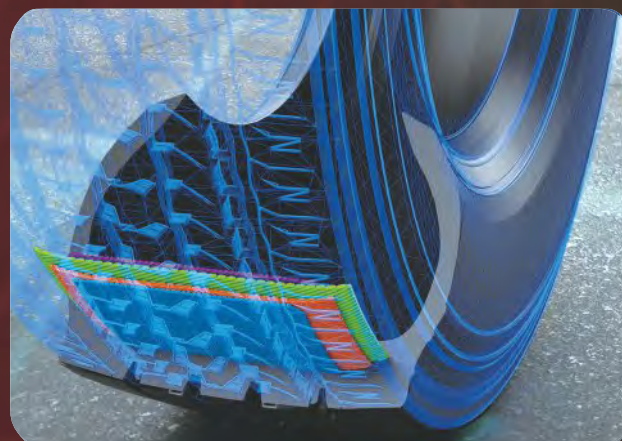

## PDOT

Pressure Distribution Optimization Technology (PDOT) - Longer mileage and higher fuel economy

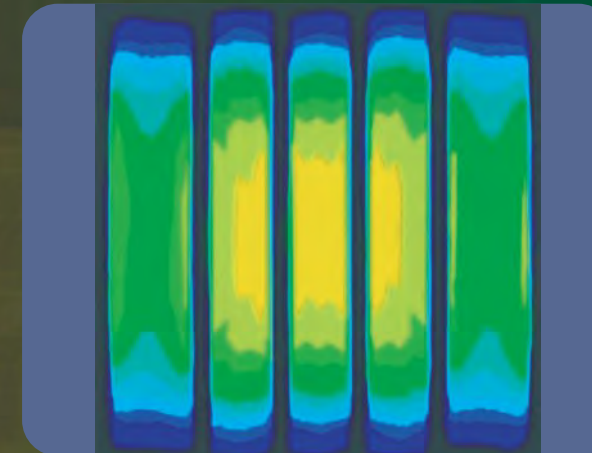

- Optimized Tyre Footprint and Better Contact Pressure Distribution
- Rectangular Footprint Shape for Even Pressure Distribution
- Reduced Tyre Slipping in Cornering
- Improved Tyre Life and Fuel Economy

The pressure distribution of the tyre footprint affects fuel consumption and treadwear. PDOT is used to optimize the tyre footprint and improve the contact pressure distribution. In a straight-line driving, the footprint maintains a rectangular shape for even pressure distributions; when cornering, it reduces slipping between the tyre and the ground. This improves your tyre life and fuel economy.

## GSCT

Groove Strain-stress Control Technology (GSCT) - Less occurrence of groove cracking in driving

- Controllable Groove Pattern Shape When Inflated
- Uniform Distribution of Pattern Groove Bottom Stress for Lower Heat Generation
- Less Occurrence of Groove Cracking in Driving

Groove Strain-stress Control Technology can control the groove width change when the tyre is inflated. This would reduce stress concentration in pattern groove bottom, thus reducing heat generation. It minimizes the occurrence of groove cracking and prolongs tyre life.




## SSHT

Shoulder Stiffness Hold Technology (SSHT) - Less uneven wear

- Less Uneven Wear of Tyre Better Tyre Inflation Profile through PSCT
- Reinforced Tyre Sidewall
- Optimized Tyre Footprint, Improved Contact Pressure Distribution and Reduced Heat Generation of Sidewall Deformation
- Less Uneven Wear of Tyre

Shoulder Stiffness Hold Technology brings the tyre inflation profile closer to the design profile. It greatly strengthens the tyre sidewall. Meanwhile, it optimizes tyre footprints, improves contact pressure distributions, and reduces the heat generated by sidewall deformation. This technology cuts the chances of sidewall bubbles and solves the problem of tyre uneven wear.

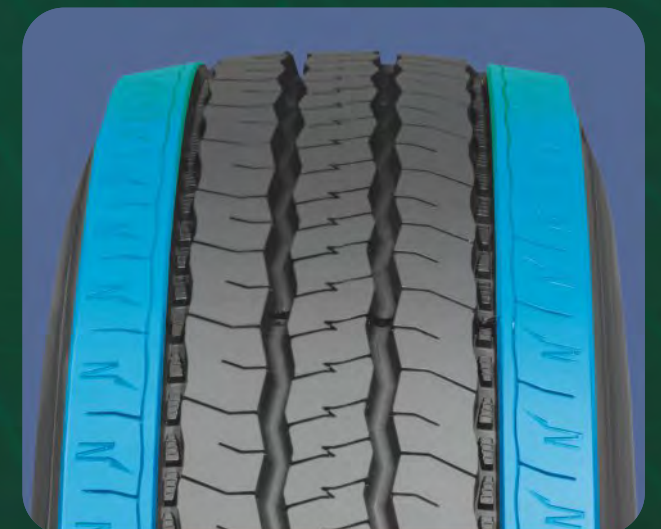





# CONTENTS

ZC-RUBBER TRUCK & BUS TYRE



Long Haul

13



Regional

32



Mixed Service

49



Urban

71



Winter

75



| ROAD          |  | POSITION | STEER/TRAILER                                                                                                                                                                                                                                                                                                                      | DRIVE                                                                                                                                                                                                                                 | TRAILER                                                           |
|---------------|--|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
| LONG HAUL     |  |          | AS898            AS858            AZ817            AS668            AZ670            AT586<br>AS678            AZ599            AS578            CR976A            CR960A            CR989                                                                                                                                         | AD818            AD819            AD733            AD713            AD751            CM335/A<br>AD710/A            CM983            AD757            AD781            AD528                                                           | AT566            AT555            AT556<br>CR931            CR915 |
|               |  |          | AZ850            AT530            AZ828            CM958            AZ676            AZ534+            MZ679            AZ531            AZ675            AZ712<br>MD752            AZ655S            AZ650            CM772            CM912            AZ589            AZ686            AZ697            CR907            CR950 | AD756            CM980            CM987/E            CM986                                                                                                                                                                            | AT532            AT512            AT560                           |
| MIXED SERVICE |  | ON & OFF | CR926/+B/D            AT557            CM988            EZ573<br>CM998/+            EZ861            EZ865            EZ867            CM913                                                                                                                                                                                       | CM954            CM923            MD738            EZ356            EZ373            MD777            EZ591            MD726            EZ377Pro            EZ399            CB999            CB981            CB901            EZ372 |                                                                   |
|               |  | MINING   | EZ870            EZ310            CB972            CB919            CB905<br>CB332            EZ330                                                                                                                                                                                                                                |                                                                                                                                                                                                                                       |                                                                   |
| URBAN         |  |          | CR906II            AZ675            AZ687                                                                                                                                                                                                                                                                                          | MD703                                                                                                                                                                                                                                 |                                                                   |
| WINTER        |  |          | NS785            NZ780            NZ782            NZ787            NZ788                                                                                                                                                                                                                                                          | ND783            IceTrac N2                                                                                                                                                                                                           |                                                                   |

APPLICATION AND KEY FEATURE LEGEND

Long Haul

Regional

Mixed Service

Urban


Winter

- Long distance journey with constant speed, less braking and accelerating
  - Less fuel consumption and comfortable ride
  - High mileage performance
- Shorter journey with frequent braking, accelerating and turning
  - Improved road grip with maximum mileage
  - Exceptional tough type

- Used both on and off road
  - Heavy loads and outstanding durability
  - Special protection against the damage caused by the road condition
- Frequent speed changes and turning
  - Resistance to curb impact
  - Excellent road grip and durable high mileage

- Contribute to safety and operating in winter conditions
  - Outstanding grip performance on ice and snow road surface
  - Stable handling during braking and turning



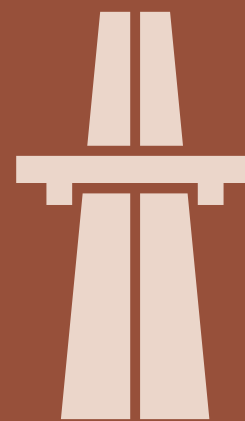

## LONG HAUL

Long distance journey with constant speed and less braking and accelerating

Less fuel consumption and comfortable ride

High mileage performance

# LONG HAUL

## STEER/TRAILER



AS898

AS858

AZ817

AS668

AZ670

AT586



AS678

AZ599

AS578

CR976A

CR960A

CR989

## DRIVE



AD818

AD819

AD733

AD713

AD751

CM335/A

AD710/A

CM983

AD757

AD781

AD528

## TRAILER



AT566

AT555

AT556

CR931

CR915






# AS898



● : Recommendable    ● : Available




High mileage tyres suitable for long haul application (High mileage formula, high saturation, Large parameters)

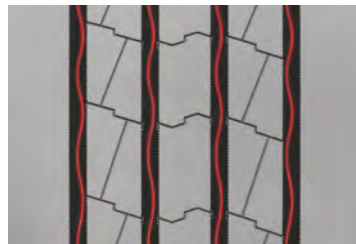

The main ditch adopts a zigzag design with groove bottom patterns, Strengthen stone removal performance to avoid tyre malfunctions


## Footprint

Finite element simulation analysis, More uniform distribution of tyre contact pressure, improve uneven wear performance

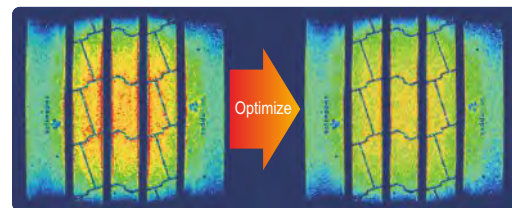

## Belt Durability

Optimal belt gap minimize shearing force between the belts with ZC-Rubber's CBOT technology

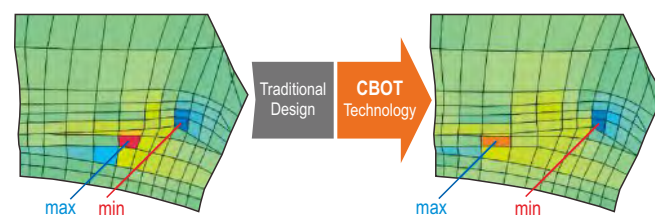

# AS858




● : Recommendable    ● : Available




Brand new flagship tyre for long haul application with Longer mileage and higher fuel economy based on PSCT

BTCT technology provides a rectangle footprint and even wear



V-shape groove design minimizes the occurrence of groove cracking



Deep siping design guarantee a stability driving through the whole tyre life



Shoulder heat dissipation design reduce tread rigidity and improve the durability of tyre

| Size        | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|             |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|             |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 11.00R20    | J/18    | 152/149K           | 18.5             | 8.00         | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| 9.5R17.5    | J/18    | 143/141J           | 13.0             | 6.75         | 840                   | 234                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| 215/75R17.5 | H/16    | 135/133J           | 13.0             | 6.00         | 765                   | 216                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| 235/75R17.5 | H/16    | 143/141J           | 13.5             | 6.75         | 792                   | 236                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| 11R22.5     | H/16    | 148/145L           | 17.5             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| 12R22.5     | J/18    | 152/149L           | 18.5             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| 295/80R22.5 | J/18    | 152/149M           | 16.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| 315/80R22.5 | J/18    | 154/151M(156/153L) | 15.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |

🇨🇳 Made in China    🇹🇭 Made in Thailand

| Size     | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|          |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|          |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 11.00R20 | J/18    | 152/149K      | 16.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| 12.00R20 | L/20    | 156/153J      | 17.0             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |
| 11R22.5  | H/16    | 148/145L      | 17.5             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| 11R22.5  | J/18    | 149/146L      | 17.5             | 8.25         | 1065                  | 279                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| 12R22.5  | J/18    | 152/149L      | 18.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| 12R22.5  | J/18    | 152/149L      | 18.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |

🇨🇳 Made in China    🇹🇭 Made in Thailand





- Advanced 5-Rib tread provides even wear and remarkable handling
- Hidden longitudinal ditch design, Collaborative with 3D three-dimensional steel sheets, Enhance the strength of adjacent pattern blocks, Increase tyre grip
- Shoulder longitudinal groove design with twists, Provide better handling stability, Gutter bottom adhesive nail design, Improve stone removal performance



● : Recommendable  
● : Available

## AZ817<sup>PRO</sup> / AZ817

| Size                    | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                         |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                         |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 315/60R22.5(AZ817PRO) | L/20    | 154/150L(152/148M) | 14.5             | 9.75         | 950                   | 313                | 3750                                          | 8270  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| ● 315/70R22.5           | L/20    | 156/150L           | 14.5             | 9.00         | 1014                  | 312                | 4000                                          | 8820  | 900   | 130   | 3350 | 7390  | 900   | 130   |

● Made in China



- Premium five-rib tread provides outstanding handling for steer application
- Decoupling grooves prevent uneven tread wear and ensure long tread life for long distance travel
- Wide and deep tread guarantee longer mileage with affordable cost and remarkable value



● : Recommendable  
● : Available

## AS668

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5     | G/14    | 144/142M           | 17.0             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145L           | 17.0             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 11R22.5     | J/18    | 149/146L           | 17.0             | 8.25         | 1054                  | 279                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 12R22.5     | J/18    | 152/149L           | 17.5             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 13R22.5     | J/18    | 156/151K           | 18.0             | 9.75         | 1124                  | 320                | 4000                                          | 8820  | 875   | 128   | 3450 | 7610  | 875   | 128   |
| ● 275/70R22.5 | H/16    | 148/145L           | 15.0             | 8.25         | 958                   | 276                | 3150                                          | 6940  | 900   | 130   | 2900 | 6395  | 900   | 130   |
| ● 295/75R22.5 | G/14    | 144/141L           | 17.0             | 9.00         | 1014                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |
| ● 295/80R22.5 | H/16    | 150/147M           | 16.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5 | J/18    | 152/149M           | 16.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5 | J/18    | 154/151M(156/150L) | 16.5             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5 | L/20    | 157/154K           | 16.5             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |
| ● 11R24.5     | G/14    | 146/143L           | 17.0             | 8.25         | 1104                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5     | H/16    | 149/146L           | 17.0             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

● Made in China    ● Made in Thailand



- Premium five-rib tread with various pitches to provide quiet and comfortable riding
- Stone ejection design reduces stone retention and casing penetration
- Computer aided casing design helps improve footprint for better mileage performance



● : Recommendable  
● : Available

## AZ670

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5     | G/14    | 144/142M      | 16.0             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145M      | 16.0             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5     | J/18    | 152/149L      | 16.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 255/70R22.5 | H/16    | 140/137M      | 15.0             | 7.50         | 930                   | 255                | 2500                                          | 5510  | 830   | 120   | 2300 | 5070  | 830   | 120   |
| ● 295/80R22.5 | H/16    | 150/147M      | 16.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5 | J/18    | 152/149M      | 16.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |

● Made in China    ● Made in Thailand



- High saturation pattern design, Improving tyre wear resistance, Significantly increase vehicle mileage
- The main ditch adopts a zigzag design with groove bottom patterns, Strengthen stone removal performance to avoid tyre malfunctions
- Design of circumferential drainage shallow ditch, Improve vehicle handling



● : Recommendable  
● : Available

## AT586

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 315/80R22.5 | J/18    | 154/151M(156/153L) | 13.5             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |

● Made in China





- Applicable for steer and free-rolling wheel position
- Five ribs with four straight grooves for precise handling
- Special designed tyre casing for better mileage and more value for customers
- Cross rib sipes provide better wet traction and reduce external noise



● : Recommendable    ● : Available

AS678

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11.00R20    | J/18    | 152/149K           | 16.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 11.00R22    | H/16    | 152/149K           | 14.2             | 8.0          | 1122                  | 288                | 3550                                          | 7825  | 830   | 120   | 3250 | 7165  | 830   | 120   |
| ● 9.5R17.5    | G/14    | 129/127L           | 13.0             | 6.75         | 842                   | 240                | 1850                                          | 4080  | 750   | 109   | 1750 | 3860  | 750   | 109   |
| ● 9.5R17.5    | H/16    | 143/141J           | 13.0             | 6.75         | 842                   | 240                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 225/80R17.5 | H/16    | 123/122L           | 14.0             | 6.75         | 805                   | 226                | 1550                                          | 3415  | 700   | 102   | 1500 | 3305  | 700   | 102   |
| ● 225/90R17.5 | H/16    | 127/125L           | 13.0             | 6.75         | 851                   | 226                | 1750                                          | 3860  | 700   | 102   | 1650 | 3640  | 700   | 102   |
| ● 11R22.5     | G/14    | 144/142M           | 14.2             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 146/143L           | 14.2             | 8.25         | 1054                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145L           | 14.2             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 255/70R22.5 | H/16    | 140/137M           | 14.5             | 7.50         | 930                   | 255                | 2500                                          | 5510  | 830   | 120   | 2300 | 5070  | 830   | 120   |
| ● 295/75R22.5 | G/14    | 144/141L           | 14.2             | 9.00         | 1014                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |
| ● 275/80R22.5 | H/16    | 149/146M           | 14.0             | 8.25         | 1012                  | 276                | 3250                                          | 7165  | 850   | 123   | 3000 | 6610  | 850   | 123   |
| ● 295/80R22.5 | H/16    | 150/147M           | 15.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5 | J/18    | 152/149M           | 15.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5 | J/18    | 154/151M(156/153L) | 15.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5 | L/20    | 157/154K           | 15.0             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |
| ● 11R24.5     | G/14    | 146/143L           | 14.2             | 8.25         | 1104                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5     | H/16    | 149/146L           | 14.2             | 8.25         | 1104                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |
| ● 285/75R24.5 | G/14    | 144/141L           | 14.2             | 8.25         | 1050                  | 283                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |

● Made in China    ● Made in Thailand



- Four wide tread grooves allows excellent water drainage
- Multi siping provides outstanding traction on both dry and wet road surfaces
- Computer designed tyre casing assures excellent footprint for extended tyre life



● : Recommendable    ● : Available

AZ599

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 215/75R17.5 | H/16    | 135/133J           | 12.0             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| ● 225/80R17.5 | H/16    | 123/122L           | 13.0             | 6.75         | 797                   | 233                | 1550                                          | 3415  | 700   | 102   | 1500 | 3305  | 700   | 102   |
| ● 235/75R17.5 | H/16    | 143/141J           | 13.0             | 6.75         | 797                   | 233                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 245/70R17.5 | J/18    | 143/141J           | 14.0             | 7.50         | 789                   | 248                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 225/70R19.5 | G/14    | 128/126N           | 13.0             | 6.75         | 811                   | 226                | 1800                                          | 3970  | 760   | 110   | 1700 | 3750  | 760   | 110   |
| ● 245/70R19.5 | H/16    | 136/134M           | 14.0             | 7.50         | 839                   | 248                | 2240                                          | 4940  | 830   | 120   | 2120 | 4675  | 830   | 120   |
| ● 265/70R19.5 | H/16    | 140/138M           | 14.0             | 7.50         | 867                   | 262                | 2500                                          | 5510  | 775   | 112   | 2360 | 5200  | 775   | 112   |
| ● 11R22.5     | H/16    | 148/145L           | 14.2             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 255/70R22.5 | H/16    | 140/137M           | 14.5             | 7.50         | 930                   | 255                | 2500                                          | 5510  | 830   | 120   | 2300 | 5070  | 830   | 120   |
| ● 275/70R22.5 | H/16    | 148/145L           | 14.5             | 8.25         | 958                   | 276                | 3150                                          | 6940  | 900   | 130   | 2900 | 6395  | 900   | 130   |
| ● 295/75R22.5 | G/14    | 144/141L           | 14.2             | 9.00         | 1014                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |
| ● 295/80R22.5 | J/18    | 152/149M           | 15.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5 | J/18    | 154/151M(156/153L) | 15.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 11R24.5     | G/14    | 146/143L           | 14.2             | 8.25         | 1104                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5     | H/16    | 149/146J           | 14.2             | 8.25         | 1104                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |
| ● 285/75R24.5 | G/14    | 144/141L           | 14.2             | 8.25         | 1050                  | 283                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |

● Made in China





- Optimized steer and trailer pattern for long haul application with fuel efficiency
- High volume pattern design guarantees long mileage and fuel efficiency
- Straight simple rib pattern improves efficient water evacuation for excellent wet traction and handling
- Four waved grooves aids in stone rejection performance
- Improved close shoulder reduces the irregular wear throughout the duration of tread-life



● : Recommendable    ● : Available

## AS578

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11.00R20    | J/18    | 152/149K           | 16.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 9.5R17.5    | H/16    | 143/141J           | 13.0             | 6.75         | 842                   | 240                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 10R22.5     | H/16    | 144/142M           | 15.0             | 7.50         | 254                   | 1019               | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| ● 11R22.5     | H/16    | 148/145L           | 14.2             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5     | J/18    | 152/149L           | 15.5             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 295/60R22.5 | J/18    | 150/147L           | 15.0             | 9.00         | 926                   | 292                | 3350                                          | 7390  | 900   | 131   | 3075 | 6780  | 900   | 131   |
| ● 245/70R22.5 | J/18    | 142/139K           | 15.0             | 7.50         | 915                   | 248                | 2650                                          | 5840  | 900   | 131   | 2430 | 5360  | 900   | 131   |
| ● 255/70R22.5 | H/16    | 140/137M           | 14.5             | 7.50         | 930                   | 255                | 2500                                          | 5510  | 830   | 120   | 2300 | 5070  | 830   | 120   |
| ● 275/70R22.5 | H/16    | 144/141M           | 15.5             | 8.25         | 958                   | 276                | 2800                                          | 6175  | 830   | 120   | 2575 | 5675  | 830   | 120   |
| ● 315/70R22.5 | L/20    | 156/150L           | 13.5             | 9.00         | 1014                  | 312                | 4000                                          | 8820  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| ● 275/80R22.5 | J/18    | 149/146L           | 14.0             | 8.25         | 1012                  | 276                | 3250                                          | 7165  | 900   | 130   | 3000 | 6610  | 900   | 130   |
| ● 295/80R22.5 | H/16    | 150/147M           | 15.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5 | J/18    | 152/149M           | 15.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5 | J/18    | 154/151M(156/153L) | 15.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |

● Made in China



## CR976A

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 385/65R22.5 | J/18    | 158L(160K)         | 15.5             | 11.75        | 1072                  | 389                | 4250                                          | 9370  | 850   | 125   | -    | -     | -     | -     |
| ● 385/65R22.5 | L/20    | 160K(158L)         | 15.5             | 11.75        | 1072                  | 389                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |
| ● 425/65R22.5 | L/20    | 165K               | 15.0             | 12.25        | 1124                  | 430                | 5150                                          | 11400 | 830   | 120   | -    | -     | -     | -     |
| ● 445/65R22.5 | L/20    | 169K               | 15.0             | 13.00        | 1150                  | 444                | 5800                                          | 12775 | 900   | 130   | -    | -     | -     | -     |
| ● 9.00R20     | H/16    | 144/142K           | 14.5             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| ● 10.00R20    | H/16    | 146/143K           | 15.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| ● 10.00R20    | J/18    | 149/146J           | 15.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 11.00R20    | J/18    | 152/149K           | 15.5             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 12.00R20    | J/18    | 154/151K           | 17.0             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 12.00R20    | L/20    | 156/153J           | 17.0             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |
| ● 215/75R17.5 | H/16    | 135/133J           | 12.5             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| ● 225/70R19.5 | G/14    | 128/126M           | 13.0             | 6.75         | 811                   | 226                | 1800                                          | 3970  | 760   | 110   | 1700 | 3750  | 760   | 110   |
| ● 245/70R19.5 | G/14    | 133/131M           | 13.0             | 7.50         | 839                   | 248                | 2060                                          | 4540  | 760   | 110   | 1950 | 4300  | 760   | 110   |
| ● 245/70R19.5 | H/16    | 136/134M           | 13.0             | 7.50         | 839                   | 248                | 2240                                          | 4940  | 830   | 120   | 2120 | 4675  | 830   | 120   |
| ● 265/70R19.5 | H/16    | 140/138M           | 14.0             | 7.50         | 867                   | 262                | 2500                                          | 5510  | 775   | 112   | 2360 | 5200  | 775   | 112   |
| ● 265/70R19.5 | J/18    | 143/141J           | 14.0             | 7.50         | 867                   | 262                | 2725                                          | 6005  | 850   | 123   | 2575 | 5675  | 850   | 123   |
| ● 11R22.5     | G/14    | 144/142M           | 15.5             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145M           | 15.5             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 11R22.5     | J/18    | 149/146L           | 15.5             | 8.25         | 1054                  | 279                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 12R22.5     | J/18    | 152/149L           | 15.5             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 255/70R22.5 | H/16    | 140/137M           | 14.5             | 7.50         | 930                   | 255                | 2500                                          | 5510  | 830   | 120   | 2300 | 5070  | 830   | 120   |
| ● 275/70R22.5 | H/16    | 148/145M           | 14.0             | 8.25         | 958                   | 276                | 3150                                          | 6940  | 900   | 130   | 2900 | 6395  | 900   | 130   |
| ● 275/80R22.5 | H/16    | 149/146M           | 14.0             | 8.25         | 1012                  | 276                | 3250                                          | 7165  | 850   | 123   | 3000 | 6610  | 850   | 123   |
| ● 295/80R22.5 | H/16    | 150/147M           | 15.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5 | J/18    | 152/149M           | 15.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5 | J/18    | 154/151M(156/150L) | 16.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5 | L/20    | 157/154K           | 16.0             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

● Made in China    ● Made in Thailand

- Multi-rib tread design with wide straight grooves for precise handling and outstanding traction
- Stone rejector platforms prevent stones from lodging in grooves and drilling into belts
- Shallower tread depth helps to resist tread squirm and irregular wear forces for exceptionally long mileage



● : Recommendable    ● : Available





- Improved close shoulder helps to improve even wear resulting in long tread life
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads



● : Recommendable    ● : Available

## CR960A

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 7.50R16     | G/14    | 122/118L           | 12.0             | 6.00G        | 805                   | 215                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| ● 8.25R16     | G/14    | 128/126L           | 13.0             | 6.50H        | 855                   | 235                | 1800                                          | 3970  | 670   | 97    | 1700 | 3750  | 670   | 97    |
| ● 8.25R16     | H/16    | 128/124L           | 13.0             | 6.50H        | 855                   | 235                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| ● 245/70R17.5 | H/16    | 136/134M           | 13.0             | 7.50         | 789                   | 248                | 2240                                          | 4940  | 850   | 123   | 2120 | 4675  | 850   | 123   |
| ● 245/70R17.5 | J/18    | 143/141J           | 13.0             | 7.50         | 789                   | 248                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 205/75R17.5 | G/14    | 124/122M           | 12.0             | 6.00         | 753                   | 205                | 1600                                          | 3525  | 750   | 109   | 1500 | 3305  | 750   | 109   |
| ● 215/75R17.5 | H/16    | 135/133J           | 12.5             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| ● 225/75R17.5 | G/14    | 129/127M           | 12.5             | 6.75         | 783                   | 226                | 1850                                          | 4080  | 725   | 105   | 1750 | 3860  | 725   | 105   |
| ● 235/75R17.5 | G/14    | 132/130M           | 13.3             | 6.75         | 797                   | 233                | 2000                                          | 4410  | 775   | 112   | 1900 | 4190  | 775   | 112   |
| ● 235/75R17.5 | H/16    | 143/141J           | 13.3             | 6.75         | 797                   | 233                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 8R19.5      | F/12    | 124/122L           | 13.0             | 6.00         | 859                   | 203                | 1600                                          | 3525  | 760   | 110   | 1500 | 3305  | 760   | 110   |
| ● 225/70R19.5 | F/12    | 125/123M           | 13.0             | 6.75         | 811                   | 226                | 1650                                          | 3640  | 660   | 95    | 1550 | 3415  | 660   | 95    |
| ● 245/70R19.5 | G/14    | 133/131M           | 13.0             | 7.50         | 839                   | 248                | 2060                                          | 4540  | 760   | 110   | 1950 | 4300  | 760   | 110   |
| ● 245/70R19.5 | H/16    | 136/134M           | 13.0             | 7.50         | 839                   | 248                | 2240                                          | 4940  | 830   | 120   | 2120 | 4675  | 830   | 120   |
| ● 265/70R19.5 | H/16    | 140/138M           | 14.0             | 7.50         | 867                   | 262                | 2500                                          | 5510  | 775   | 112   | 2360 | 5200  | 775   | 112   |
| ● 265/70R19.5 | J/18    | 143/141J           | 14.0             | 7.50         | 867                   | 262                | 2725                                          | 6005  | 850   | 123   | 2575 | 5675  | 850   | 123   |
| ● 285/70R19.5 | H/16    | 146/144K           | 14.5             | 8.25         | 895                   | 283                | 3000                                          | 6610  | 850   | 123   | 2800 | 6175  | 850   | 123   |
| ● 11R22.5     | G/14    | 144/142L           | 14.2             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145M           | 14.2             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 315/70R22.5 | L/20    | 156/150L           | 15.0             | 9.00         | 1014                  | 312                | 4000                                          | 8820  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| ● 295/75R22.5 | G/14    | 144/141L           | 14.2             | 9.00         | 1014                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |
| ● 315/80R22.5 | J/18    | 154/151M(156/150L) | 15.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5 | L/20    | 157/154K           | 15.0             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |
| ● 11R24.5     | G/14    | 146/143L           | 14.2             | 8.25         | 1104                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5     | H/16    | 149/146L           | 14.2             | 8.25         | 1104                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |
| ● 285/75R24.5 | G/14    | 144/141L           | 14.2             | 8.25         | 1050                  | 283                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |

● Made in China    ● Made in Thailand



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Decoupling tread design suitable for long-distance travel
- Applicable for steer and free-rolling wheel position



● : Recommendable    ● : Available

## CR989

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5     | G/14    | 144/142L      | 14.2             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145M      | 14.2             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 295/75R22.5 | G/14    | 144/141L      | 14.2             | 9.00         | 1014                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |
| ● 11R24.5     | G/14    | 146/143L      | 15.0             | 8.25         | 1104                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5     | H/16    | 149/146L      | 15.0             | 8.25         | 1104                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |
| ● 285/75R24.5 | G/14    | 144/141L      | 15.0             | 8.25         | 1050                  | 283                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |

● Made in China    ● Made in Thailand





# AD818




● : Recommendable




- 1 Classic block pattern, Better driving performance and grip performance
- 2 Shoulder reinforcement design, Enhance durability of use
- 3 Wider tread, Higher saturation, High mileage formula to increase tyre mileage

## Belt Durability

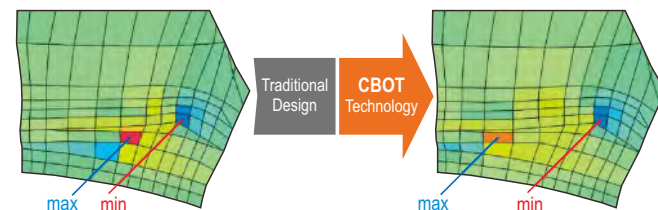

Optimal belt gap minimize shearing force between the belts with ZC-Rubber's CBOT technology

## Footprint

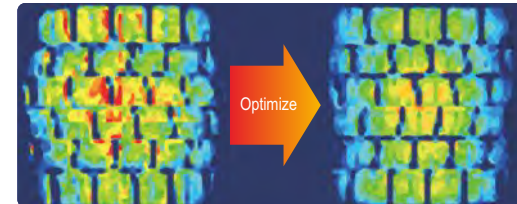

Finite element simulation analysis, More uniform distribution of tyre contact pressure, improve uneven wear performance

| Size             | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                  |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                  |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 🇨🇳🇹🇭 295/60R22.5 | J/18    | 150/147K           | 20.0             | 9.00         | 932                   | 292                | 3350                                          | 7390  | 900   | 131   | 3075 | 6780  | 900   | 131   |
| 🇨🇳🇹🇭 315/60R22.5 | L/20    | 154/150K(152/148L) | 20.0             | 9.75         | 956                   | 315                | 3750                                          | 8270  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| 🇨🇳🇹🇭 315/70R22.5 | L/20    | 154/150L(152/148M) | 21.0             | 9.00         | 1020                  | 312                | 3750                                          | 8270  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| 🇨🇳🇹🇭 295/80R22.5 | J/18    | 152/149M           | 20.6             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| 🇨🇳🇹🇭 315/80R22.5 | L/20    | 157/154K           | 22.5             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

🇨🇳 Made in China 🇹🇭 Made in Thailand

NEW



- Wider and deeper tread, Higher saturation, High mileage formula, super high mileage
- Directional design, Tortuous longitudinal main groove, more reasonable arrangement of pattern blocks, Provide powerful traction performance
- Application of Ultra High Strength Skeleton Materials, Improve tire safety and retread



● : Recommendable

# AD819

| Size           | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 🇨🇳 315/80R22.5 | J/18    | 154/151M(156/153L) | 24.0             | 9.00         | 1082                  | 280                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |

🇨🇳 Made in Thailand



- Ultra deep tread with robust tread blocks features excellent wet traction and longer tyre life
- Drive axle applicable providing lateral stability and multiple retreads
- Latest carcass technology guarantees superior footprint and enhances damage resistance



● : Recommendable

# AD733

| Size             | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                  |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                  |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 🇨🇳🇹🇭 12R22.5     | J/18    | 152/149L           | 23.0             | 9.00         | 1096                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| 🇨🇳🇹🇭 305/70R22.5 | L/20    | 151/148M(153/150L) | 22.0             | 9.00         | 1018                  | 317                | 3450                                          | 7610  | 900   | 130   | 3150 | 6940  | 900   | 130   |
| 🇨🇳🇹🇭 295/80R22.5 | H/16    | 150/147M           | 20.6             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| 🇨🇳🇹🇭 295/80R22.5 | J/18    | 152/149M           | 20.6             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |

🇨🇳 Made in China 🇹🇭 Made in Thailand





- Ultra deep tread with robust tread blocks features excellent wet traction and longer tyre life
- Drive axle applicable providing lateral stability and multiple retreads
- Latest carcass technology guarantees superior footprint and enhances damage resistance



● : Recommendable

## AD713/AD751

| Size                       | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                            |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                            |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5(AD713)           | G/14    | 144/142L           | 22.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5(AD713)           | H/16    | 148/145L           | 22.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5(AD713/AD751)     | J/18    | 152/149L           | 23.0             | 9.00         | 1096                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 275/70R22.5(AD713)       | H/16    | 148/145L           | 18.5             | 8.25         | 958                   | 276                | 3150                                          | 6940  | 900   | 130   | 2900 | 6395  | 900   | 130   |
| ● 295/80R22.5(AD713)       | H/16    | 150/147M           | 20.0             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5(AD713)       | J/18    | 152/149M           | 20.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5(AD713/AD751) | J/18    | 154/151M(156/150L) | 22.5             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5(AD713)       | L/20    | 157/154K           | 22.5             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

● Made in China    ● Made in Thailand



- Strong center tread blocks provide excellent all-weather traction
- Special designed tread grooves reduce stone retention for extended tyre life
- Advanced tread compound provides remarkable performance for long haul service



● : Recommendable

## AD710/AD710A

| Size                  | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                       |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                       |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11.00R20(AD710)     | J/18    | 152/149K           | 19.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 265/70R19.5(AD710A) | H/16    | 140/138M           | 16.0             | 7.50         | 867                   | 262                | 2500                                          | 5510  | 775   | 112   | 2360 | 5200  | 775   | 112   |
| ● 265/70R19.5(AD710A) | J/18    | 143/141J           | 16.0             | 7.50         | 867                   | 262                | 2725                                          | 6005  | 850   | 123   | 2575 | 5675  | 850   | 123   |
| ● 11R22.5(AD710A)     | G/14    | 144/142L           | 19.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5(AD710A)     | H/16    | 148/145L           | 19.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5(AD710A)     | J/18    | 152/149L           | 20.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 295/80R22.5(AD710A) | H/16    | 150/147M           | 20.6             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5(AD710A) | J/18    | 152/149M           | 20.6             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5(AD710A) | J/18    | 154/151M(156/150L) | 20.6             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5(AD710A) | L/20    | 157/154K           | 20.6             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

● Made in China



- Designed to provide exceptional Performance and Life in Linehaul Drive applications
- Large block design helps enhance handling and traction on all season highway conditions
- Tread bars maintain an even footprint and help prevent tyre squirm
- Cool running compound to promote longer life, Great CPK (Cost Per Kilometer) performer



● : Recommendable

## CM335/CM335A

| Size                 | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                      |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                      |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 495/45R22.5(CM335) | L/20    | 169K               | 19.0             | 17.00        | 1018                  | 500                | 5800                                          | 12800 | 900   | 130   | —    | —     | —     | —     |
| ● 11R22.5(CM335)     | G/14    | 144/142M           | 20.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5(CM335)     | H/16    | 148/145M           | 20.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5(CM335A)    | J/18    | 152/149L           | 20.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 295/60R22.5(CM335) | J/18    | 150/147K           | 19.0             | 9.00         | 926                   | 292                | 3350                                          | 7390  | 900   | 131   | 3075 | 6780  | 900   | 131   |
| ● 315/60R22.5(CM335) | L/20    | 154/150L(152/148M) | 18.0             | 9.75         | 950                   | 313                | 3750                                          | 8270  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| ● 315/70R22.5(CM335) | L/20    | 154/150L           | 18.0             | 9.00         | 1020                  | 312                | 3750                                          | 8270  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| ● 295/80R22.5(CM335) | H/16    | 150/147M           | 18.0             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5(CM335) | J/18    | 152/149M           | 18.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5(CM335) | J/18    | 154/151M(156/150L) | 20.6             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5(CM335) | L/20    | 157/154K           | 20.6             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

● Made in China    ● Made in Thailand



- Wide and deep tread helps to promote even wear and long tread life resulting in low cost per mile
- Solid close shoulder ribs help to improve even wear
- Three deep grooves evacuate water efficiently for traction
- Strong casing resists cuts and punctures for enhanced toughness and long casing life



● : Recommendable

## CM983

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 10.00R20    | H/16    | 146/143K      | 18.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| ● 10.00R20    | J/18    | 149/146J      | 18.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 225/70R19.5 | G/14    | 128/126L      | 15.5             | 6.75         | 811                   | 226                | 1800                                          | 3970  | 760   | 110   | 1700 | 3750  | 760   | 110   |
| ● 11R22.5     | G/14    | 144/142L      | 20.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145L      | 20.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 295/75R22.5 | G/14    | 144/141L      | 20.6             | 9.00         | 1020                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |
| ● 11R24.5     | G/14    | 146/143L      | 20.6             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5     | H/16    | 149/146L      | 20.6             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |
| ● 285/75R24.5 | G/14    | 144/141L      | 20.6             | 8.25         | 1056                  | 283                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |

● Made in China    ● Made in Thailand





- Applicable for drive wheel position on long-distance and regional transportation
- Solid close shoulder design with special tread compound for enhanced traction
- Computer designed carcass reduces pressure on road and promotes even wear
- Improved casing structure provides remarkable footprint which guarantees longer tread life



● : Recommendable

## AD757

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5     | G/14    | 144/142L      | 20.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 146/143L      | 20.6             | 8.25         | 1065                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145L      | 20.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 295/75R22.5 | G/14    | 144/141L      | 20.6             | 9.00         | 1020                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |
| ● 11R24.5     | G/14    | 146/143L      | 20.6             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5     | H/16    | 149/146L      | 20.6             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |
| ● 285/75R24.5 | G/14    | 144/141L      | 20.6             | 8.25         | 1056                  | 283                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |

● Made in China    ● Made in Thailand



- Premium wide base drive tyre suitable for long haul application.
- Robust tread blocks offer outstanding traction on both wet and dry road condition.
- Enhanced tyre carcass guarantees lateral stability, longer mileage and easy retreadability



● : Recommendable

## AD781

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 445/50R22.5 | L/20    | 161L          | 21.2             | 14.00        | 1018                  | 445                | 4625                                          | 10200 | 830   | 120   | -    | -     | -     | -     |

● Made in China    ● Made in Thailand



- Designed to provide exceptional Performance and Life in Line haul Drive applications
- Shoulder reinforcement design, Enhance durability of use
- Special designed tread grooves reduce stone retention for extended tyre life



● : Recommendable

## AD528

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 275/80R22.5 | H/16    | 149/146M      | 18.0             | 8.25         | 1012                  | 276                | 3250                                          | 7165  | 850   | 123   | 3000 | 6610  | 850   | 123   |
| ● 295/80R22.5 | J/18    | 152/149M      | 18.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |

● Made in China



- Wide base super single tyre applicable for both steer and trailer service
- Computer designed tread structure provide even wear with less pressure on the road
- Long life tread compound with less heating enhance the original tread life
- Strong steel belt improves the casing durability and promote multiple retreads



● : Recommendable

## AT566

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 445/50R22.5 | L/20    | 161L          | 13.1             | 14.00        | 1018                  | 445                | 4625                                          | 10200 | 830   | 120   | -    | -     | -     | -     |

● Made in China    ● Made in Thailand



- Wide base trailer tyre specially designed for trailer service
- Special compound and strong tyre casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



● : Recommendable

## AT555

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 435/50R19.5 | L/20    | 160J(156K)    | 13.5             | 14.00        | 931                   | 438                | 4500                                          | 9920  | 900   | 131   | -    | -     | -     | -     |
| ● 385/55R19.5 | H/16    | 156J          | 15.0             | 12.25        | 919                   | 386                | 4000                                          | 8820  | 900   | 131   | -    | -     | -     | -     |
| ● 435/50R22.5 | M/22    | 164J          | 12.8             | 14.00        | 1008                  | 434                | 5000                                          | 11025 | 900   | 131   | -    | -     | -     | -     |

● Made in China    ● Made in Thailand



- Wide base trailer tyre specially designed for trailer service
- Special compound and strong tyre casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



● : Recommendable

## AT556

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 445/45R19.5 | L/20    | 160J(156K)    | 14.3             | 15.00        | 895                   | 446                | 4500                                          | 9920  | 900   | 131   | -    | -     | -     | -     |

● Made in China    ● Made in Thailand





- Wide base multi-rib trailer tyres with durable compound to deliver excellent value
- Strong casing structure offers multiple retreads and lower total cost
- Improved tread design promises outstanding stability with optimized footprint and better tyre life



● : Recommendable

## CR931

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 385/65R22.5 | J/18    | 158L(160K)    | 15.5             | 11.75        | 1072                  | 389                | 4250                                          | 9370  | 850   | 125   | -    | -     | -     | -     |
| ● 385/65R22.5 | L/20    | 160K(158L)    | 15.5             | 11.75        | 1072                  | 389                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |
| ● 425/65R22.5 | L/20    | 165K          | 15.0             | 12.25        | 1124                  | 430                | 5150                                          | 11400 | 830   | 120   | -    | -     | -     | -     |
| ● 445/65R22.5 | L/20    | 169K          | 15.0             | 13.00        | 1150                  | 444                | 5800                                          | 12775 | 900   | 130   | -    | -     | -     | -     |

● Made in China   ● Made in Thailand



- Cool-running compound construction reduces the energy generated within the tread for low rolling resistance
- Shallow tread depth promotes low rolling resistance for fuel economy and long even wear
- Four wide grooves provide all-season performance on wet and dry roads




● : Recommendable

## CR915

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5     | G/14    | 144/142M      | 11.0             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145M      | 11.0             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 255/70R22.5 | H/16    | 140/137L      | 11.0             | 7.50         | 930                   | 255                | 2500                                          | 5510  | 830   | 120   | 2300 | 5070  | 830   | 120   |
| ● 295/75R22.5 | G/14    | 144/141M      | 11.0             | 9.00         | 1014                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |

● Made in China   ● Made in Thailand

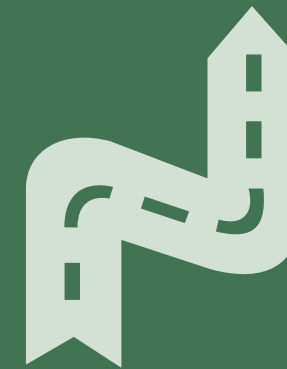

## REGIONAL

Shorter journey with frequent braking, accelerating and turning

Improved road grip with maximum mileage

Exceptional tough type



# REGIONAL

## STEER/TRAILER



AZ850 AT530 AZ828 CM958 AZ676 AZ534+ MZ679 AZ531 AZ675 AZ712



MD752 AZ655S AZ650 CM772 CM912 AZ589 AZ686 AZ697 CR907 CR950

## DRIVE



AD756 CM980 CM987/E CM986

## TRAILER



AT532 AT512 AT560


# AZ850




Brand new flagship tyre for regional application with Less uneven wear and enhanced durability based on PSCT GSCT technology minimizes the occurrence of groove cracking and prolongs tyre life




Tubeless Tube



Wider and deeper tread helps provide long tread life on various road surface



3 zigzag grooves and multi-angular sipes Improve traction and braking performance



Stone ejector in the groove protect belt from stone drilling

|      | Size        | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------|-------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|      |             |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|      |             |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 🇨🇳   | 7.00R16     | G/14    | 118/114M      | 10.0             | 6.50H        | 855                   | 235                | 1800                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| 🇨🇳   | 7.50R16     | G/14    | 122/118L      | 13.0             | 6.00G        | 215                   | 805                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| 🇨🇳   | 8.25R16     | H/16    | 128/124L      | 15.0             | 6.50H        | 235                   | 855                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| 🇨🇳   | 8.25R20     | H/16    | 139/137K      | 15.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930   | 135   | 2300 | 5070  | 930   | 135   |
| 🇨🇳   | 9.00R20     | H/16    | 144/142K      | 15.5             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| 🇨🇳   | 10.00R20    | J/18    | 149/146J      | 15.5             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| 🇨🇳🇹🇭 | 11.00R20    | J/18    | 152/149K      | 16.5             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| 🇨🇳🇹🇭 | 12.00R20    | J/18    | 154/151K      | 17.5             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| 🇨🇳🇹🇭 | 12.00R20    | L/20    | 156/153J      | 17.5             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |
| 🇨🇳   | 265/55R19.5 | G/14    | 132/130J      | 12.0             | 8.25         | 262                   | 867                | 2000                                          | 4400  | 760   | 110   | 1900 | 4190  | 760   | 110   |
| 🇨🇳   | 11R22.5     | H/16    | 148/145L      | 17.0             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| 🇨🇳🇹🇭 | 12R22.5     | J/18    | 152/149L      | 18.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| 🇨🇳   | 13R22.5     | J/18    | 156/151K      | 20.0             | 9.75         | 1124                  | 320                | 4000                                          | 8820  | 875   | 128   | 3450 | 7610  | 875   | 128   |
| 🇨🇳   | 295/80R22.5 | J/18    | 152/149M      | 18.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |





NEW



- Strong tyre carcass offers lateral durability for regional application
- High saturation pattern design, improving tyre wear resistance, significantly increase vehicle mileage
- Finite element simulation analysis, More uniform distribution of tire contact pressure, improve uneven wear performance



AT530

● : Recommendable    ● : Available

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|               |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 205/75R17.5 | G/14    | 124/122M      | 13.0             | 6.00         | 753                   | 205                | 1600                                          | 3525  | 750 109     | 1500 | 3305  | 750 109     |
| ● 215/75R17.5 | H/16    | 135/133J      | 14.0             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850 123     | 2060 | 4540  | 850 123     |
| ● 235/75R17.5 | H/16    | 143/141J      | 13.0             | 6.75         | 797                   | 233                | 2725                                          | 6005  | 875 128     | 2575 | 5675  | 875 128     |
| ● 245/70R17.5 | J/18    | 143/141J      | 13.5             | 7.50         | 789                   | 248                | 2725                                          | 6005  | 875 128     | 2575 | 5675  | 875 128     |
| ● 245/70R19.5 | J/18    | 141/140J      | 14.0             | 7.50         | 839                   | 248                | 2575                                          | 5675  | 850 123     | 2500 | 5510  | 850 123     |
| ● 265/70R19.5 | J/18    | 143/141J      | 14.0             | 7.50         | 867                   | 262                | 2725                                          | 6005  | 850 123     | 2575 | 5675  | 850 123     |

● Made in China



- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Gutter bottom adhesive nail design, Improve stone removal performance
- Improved tread compound helps resist tears and ensure good mileage in on and off road use



AZ828

● : Recommendable    ● : Available

| Size        | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|-------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|             |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|             |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 12.00R20  | L/20    | 156/153J      | 17.5             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900 131     | 3650 | 8050  | 900 131     |
| ● 12.00R24  | L/20    | 160/157K      | 15.5             | 8.5          | 1210                  | 245                | 4500                                          | 9920  | 900 131     | 4125 | 9090  | 900 131     |
| ● 325/95R24 | L/20    | 164/162J      | 15.5             | 9.00         | 1228                  | 325                | 5000                                          | 11030 | 900 131     | 4750 | 10470 | 900 131     |

● Made in China    ● Made in Thailand

Tube

Tubeless



- Multiple gripping edges slice through water and road films for a solid grip
- Four wide continuous rib design help resist tread squirm and heel-and-tow wear for exceptionally long tread life
- Three circumferential grooves help deliver all-season traction on wet or dry road
- Closed shoulder design helps promote even wear throughout the tyre life



● : Recommendable

CM958


| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 7.50R15     | H/16    | 135/133J           | 13.0             | 6.0          | 780                   | 212                | 2180                                          | 4806  | 850 123     | 2060 | 4541  | 850 123     |
| ● 8.25R15     | J/18    | 143/141L           | 14.0             | 6.50         | 836                   | 234                | 2725                                          | 6005  | 850 123     | 2575 | 5675  | 850 123     |
| ● 7.00R16     | G/14    | 118/114L           | 14.0             | 5.50F        | 785                   | 200                | 1320                                          | 2910  | 770 112     | 1180 | 2600  | 770 112     |
| ● 7.50R16     | G/14    | 122/118L           | 15.5             | 6.00G        | 815                   | 215                | 1500                                          | 3305  | 770 112     | 1320 | 2910  | 770 112     |
| ● 8.25R16     | H/16    | 128/124L           | 16.0             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 770 112     | 1600 | 3525  | 770 112     |
| ● 8.25R20     | H/16    | 139/137K           | 14.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930 135     | 2300 | 5070  | 930 135     |
| ● 9.00R20     | H/16    | 144/142K           | 16.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900 130     | 2650 | 5840  | 900 130     |
| ● 10.00R20    | H/16    | 146/143K           | 15.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830 120     | 2725 | 6005  | 830 120     |
| ● 10.00R20    | J/18    | 149/146J           | 15.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| ● 11.00R20    | J/18    | 152/149K           | 16.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| ● 12.00R20    | J/18    | 154/151K           | 17.0             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| ● 215/75R17.5 | H/16    | 135/133J           | 13.0             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850 123     | 2060 | 4540  | 850 123     |
| ● 225/80R17.5 | 10PR    | 123/122L           | 14.0             | 6.75         | 805                   | 226                | 1550                                          | 3415  | 700 102     | 1500 | 3305  | 700 102     |
| ● 8R22.5      | G/14    | 130/128M           | 13.5             | 6.00         | 935                   | 203                | 1900                                          | 4190  | 830 120     | 1800 | 3970  | 830 120     |
| ● 9R22.5      | G/14    | 136/134M           | 14.0             | 6.75         | 974                   | 229                | 2240                                          | 4940  | 830 120     | 2120 | 4675  | 830 120     |
| ● 10R22.5     | H/16    | 144/142M           | 15.0             | 7.50         | 1019                  | 254                | 2800                                          | 6175  | 900 130     | 2650 | 5840  | 900 130     |
| ● 11R22.5     | G/14    | 144/142M           | 17.5             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720 105     | 2650 | 5840  | 720 105     |
| ● 11R22.5     | H/16    | 148/145L           | 17.5             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850 123     | 2900 | 6390  | 850 123     |
| ● 12R22.5     | J/18    | 152/149L           | 18.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930 135     | 3250 | 7160  | 930 135     |
| ● 13R22.5     | J/18    | 156/150K           | 20.0             | 9.75         | 1124                  | 320                | 4000                                          | 8820  | 875 128     | 3350 | 7390  | 875 128     |
| ● 255/70R22.5 | H/16    | 140/137L           | 15.0             | 7.50         | 930                   | 255                | 2500                                          | 5510  | 830 120     | 2300 | 5070  | 830 120     |
| ● 275/70R22.5 | H/16    | 148/145K           | 16.0             | 8.25         | 958                   | 276                | 3150                                          | 6940  | 900 130     | 2900 | 6395  | 900 130     |
| ● 295/80R22.5 | H/16    | 150/147M           | 18.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830 120     | 3075 | 6780  | 830 120     |
| ● 295/80R22.5 | J/18    | 152/149M           | 18.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900 131     | 3250 | 7160  | 900 131     |
| ● 315/80R22.5 | J/18    | 154/151M(156/150L) | 18.0             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| ● 315/80R22.5 | L/20    | 157/154K           | 18.0             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900 130     | 3750 | 8270  | 900 130     |
| ● 315/80R22.5 | M/22    | 164/158K           | 18.0             | 9.00         | 1082                  | 312                | 5000                                          | 11000 | 950 138     | 4250 | 9370  | 950 138     |

● Made in China    ● Made in Thailand





- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing

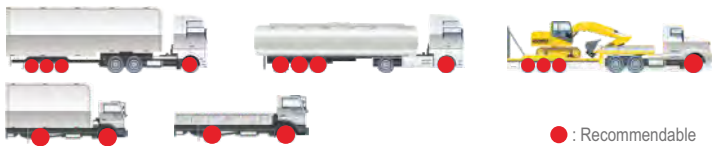

● : Recommendable

## AZ676

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 6.50R16     | F/12    | 110/105L           | 9.5              | 5.50F        | 750                   | 185                | 1060                                          | 2335  | 670   | 97    | 925  | 2040  | 670   | 97    |
| ● 7.00R16     | G/14    | 118/114L           | 11.0             | 5.50F        | 775                   | 200                | 1320                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| ● 8.25R16     | H/16    | 128/124L           | 14.0             | 6.50H        | 855                   | 235                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| ● 8.25R20     | H/16    | 139/137K           | 15.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930   | 135   | 2300 | 5070  | 930   | 135   |
| ● 9.00R20     | H/16    | 144/142K           | 15.5             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| ● 10.00R20    | H/16    | 146/143K           | 16.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| ● 10.00R20    | J/18    | 149/146J           | 16.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 11.00R20    | J/18    | 152/149K           | 16.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 12.00R20    | J/18    | 154/151K           | 17.5             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 12.00R20    | L/20    | 156/153J           | 17.5             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |
| ● 11R22.5     | G/14    | 144/142M           | 16.8             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145M           | 16.8             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 11R22.5     | J/18    | 149/146L           | 16.8             | 8.25         | 1054                  | 279                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 12R22.5     | J/18    | 152/149L           | 16.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 295/80R22.5 | H/16    | 150/147M           | 16.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5 | J/18    | 152/149L           | 16.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5 | J/18    | 154/151M(156/150L) | 16.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |

● Made in China    ● Made in Thailand



- Wide and deep tread enhance driving stability and mileage on all kinds of roads
- Special tread compound and carcass help to guarantee long tyre life and better retreadability
- Zig-zag main grooves provide superb traction level



● : Recommendable

## AZ534/AZ534+

| Size                  | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                       |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                       |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 225/80R17.5(AZ534)  | H/16    | 123/122L      | 15.8             | 6.75         | 805                   | 226                | 1550                                          | 3415  | 700   | 102   | 1500 | 3305  | 700   | 102   |
| ● 245/70R19.5(AZ534)  | G/14    | 133/131M      | 16.0             | 7.50         | 839                   | 248                | 2060                                          | 4540  | 760   | 110   | 1950 | 4300  | 760   | 110   |
| ● 245/70R19.5(AZ534)  | H/16    | 136/134M      | 16.0             | 7.50         | 839                   | 248                | 2240                                          | 4940  | 830   | 120   | 2120 | 4675  | 830   | 120   |
| ● 265/70R19.5(AZ534)  | H/16    | 140/138M      | 16.0             | 7.50         | 867                   | 262                | 2500                                          | 5510  | 775   | 112   | 2360 | 5200  | 775   | 112   |
| ● 265/70R19.5(AZ534)  | J/18    | 143/141J      | 16.0             | 7.50         | 867                   | 262                | 2725                                          | 6005  | 850   | 123   | 2575 | 5675  | 850   | 123   |
| ● 11R22.5(AZ534+)     | G/14    | 144/142L      | 17.0             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5(AZ534+)     | H/16    | 148/145L      | 17.0             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 275/80R22.5(AZ534+) | H/16    | 149/146L      | 18.0             | 8.25         | 1012                  | 276                | 3250                                          | 7165  | 850   | 123   | 3000 | 6610  | 850   | 123   |
| ● 295/80R22.5(AZ534+) | H/16    | 150/147M      | 18.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5(AZ534+) | J/18    | 152/149M      | 18.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |

● Made in China



- Four longitudinal zigzag pattern grooves design, Improve the wet skid resistance and handling performance of the vehicle's driving direction
- Widening of tyre driving surface, Sturdy appearance, Optimization design of ditch block ratio, Effectively improving shoulder grinding phenomenon, Improve wear resistance
- Design of middle groove adhesive nails, Improving the problem of stone inclusion in the middle due to high stress
- Tyre tread formula upgrade, Wear resistance and crack resistance improved by 15%



● : Recommendable

## AZ531

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 215/75R17.5 | H/16    | 135/133J      | 13.5             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| ● 235/75R17.5 | H/16    | 143/141J      | 13.5             | 6.75         | 797                   | 233                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |

● Made in China





- Wide tread width offers more stable driving feel
- Innovative stone rejertor reduces stone retention and maximize casing durability
- slanted groove design helps to prevent chunking



• : Recommendable

## MZ679

| Size            | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                 |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                 |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| • 305/70R19.5   | J/18    | 146/143L      | 14.5             | 9.00         | 923                   | 305                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| • Made in China |         |               |                  |              |                       |                    |                                               |       |       |       |      |       |       |       |



- High saturation pattern design, Improving tire wear resistance, Significantly increase vehicle mileage
- The zig-zag rib provide outstanding traction on regional application
- Special tread compounding ensuring longer wear life and service life



• : Recommendable

## AZ712

| Size            | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                 |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                 |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| • 185/85R16     | F/12    | 111/109N      | 14.0             | 5J           | 720                   | 184                | 1090                                          | 2405  | 600   | 87    | 1030 | 2270  | 600   | 87    |
| • 195/85R16     | F/12    | 114/110L      | 10.0             | 5 1/2 J      | 738                   | 196                | 1180                                          | 2600  | 650   | 94    | 1060 | 2335  | 650   | 94    |
| • 205/85R16     | F/12    | 117/115L      | 12.5             | 5 1/2 J      | 754                   | 203                | 1285                                          | 2835  | 600   | 87    | 1215 | 2680  | 600   | 87    |
| • Made in China |         |               |                  |              |                       |                    |                                               |       |       |       |      |       |       |       |



- Wide tread width offers more stable driving feel
- Extra deep tread for long tyre life and high pattern volume
- The zig-zag rib provide outstanding traction on regional application



• : Recommendable

## AZ675

| Size            | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                 |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                 |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| • 305/70R22.5   | L/20    | 153/150J      | 19.0             | 9.00         | 1018                  | 317                | 3650                                          | 8050  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| • Made in China |         |               |                  |              |                       |                    |                                               |       |       |       |      |       |       |       |



- All wheel position applicable for long or medium distance travel
- Special tread compounding ensuring longer wear life and service life
- Improved cut resistance helping to provide better tyre performance



• : Recommendable • : Available

## MD752

| Size            | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                 |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                 |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| • 12.00R24      | L/20    | 160/157K           | 16.0             | 8.5          | 1226                  | 315                | 4500                                          | 9920  | 900   | 131   | 4125 | 9090  | 900   | 131   |
| • 12R22.5       | J/18    | 152/149K           | 18.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| • 315/80R22.5   | J/18    | 154/151M(156/150L) | 18.0             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| • 315/80R22.5   | L/20    | 157/154K           | 18.0             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |
| • Made in China |         |                    |                  |              |                       |                    |                                               |       |       |       |      |       |       |       |





- Three zigzag wide grooves channel water out for excellent traction on wet roads
- Shoulder slotting, Beneficial for tyre heat dissipation, Improve tyre service life
- Stone ejector in the groove protect belt from stone drilling



● : Recommendable    ● : Available

## AZ655S

| Size                                                                                         | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------------------------------------------------------------------------------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                                                                                              |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                                                                                              |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
|  315/80R22.5 | J/18    | 154/151M(156/153L) | 18.0             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |

● Made in China    ● Made in Thailand



- Four ribs ensure even wear and comfortable riding
- Siped zig-zag rib helps improve traction on wet and muddy surface
- Deep circumferential grooves improves efficient water evacuation, lateral stability, and long tyre life



● : Recommendable    ● : Available

## CM912/CM912A

|  | Size            | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------------------------------------------------------------------------------|-----------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                                                                                     |                 |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                                                                                     |                 |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
|                                                                                     | 12.00R24(CM912) | L/20    | 160/157K      | 19.0             | 8.5          | 1226                  | 315                | 4500                                          | 9920  | 900   | 131   | 4125 | 9090  | 900   | 131   |

● Made in China    ● Made in Thailand



- Wide, deep tread helps provide long tread life in regional conditions
- Crown winding technology, Increase tyre safety performance, Improve using life



● : Recommendable    ● : Available

## AZ650

| Size                                                                                            | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------------------------------------------------------------------------------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                                                                                                 |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                                                                                                 |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
|  385/65R22.5 | N/24    | 164K          | 18.0             | 11.75        | 1072                  | 389                | 5000                                          | 11030 | 930   | 135   | -    | -     | -     | -     |

● Made in China



- Three zigzag wide grooves channel water out for excellent traction on wet roads
- Stone ejector prevent tread damage from stone drilling
- Low rolling resistance tread compound guarantees less fuel consumption for long tread life
- Tough steel belt and carcass helps protect the casing from impacts and penetrations for excellent durability



● : Recommendable

## AZ589

| Size                                                                                          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------------------------------------------------------------------------------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                                                                                               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                                                                                               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
|  7.50R17 | E/10    | 116/114L      | 12.0             | 6.00J        | 850                   | 396                | 1270                                          | 2800  | 520   | 75    | 1180 | 2600  | 520   | 75    |

● Made in China



- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads
- Stone rejector reduces stone retention and maximize casing durability



● : Recommendable    ● : Available

## CM772

| Size                                                                                          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------------------------------------------------------------------------------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                                                                                               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                                                                                               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
|  325/95R24 | M/22    | 162/160K      | 20.0             | 9.00         | 1228                  | 325                | 4750                                          | 10470 | 850   | 123   | 4500 | 9920  | 850   | 123   |

● Made in China





- Wide tread width offers more stable driving feel
- Extra deep tread for long tyre life and high pattern volume
- The zig-zag rib provide outstanding traction on regional application
- Cross rib sipes slice through water for solid control on wet roads



• : Recommendable

AZ686

| Size     | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|          |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|          |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 7.00R15  | F/12    | 113/109L      | 12.0             | 5.50F        | 750                   | 200                | 1150                                          | 2535  | 670   | 97    | 1030 | 2270  | 670   | 97    |
| 6.50R16  | F/12    | 110/105L      | 11.0             | 5.50F        | 750                   | 185                | 1060                                          | 2336  | 670   | 97    | 925  | 2038  | 670   | 97    |
| 7.00R16  | G/14    | 118/114L      | 12.0             | 5.50F        | 200                   | 775                | 1320                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| 7.50R16  | G/14    | 122/118L      | 13.0             | 6.00G        | 215                   | 805                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| 8.25R16  | J/18    | 134/129K      | 14.0             | 6.50H        | 857                   | 235                | 2120                                          | 4675  | 850   | 123   | 1800 | 4080  | 850   | 123   |
| 10.00R20 | H/16    | 146/143K      | 15.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| 10.00R20 | J/18    | 149/146J      | 15.0             | 7.5          | 278                   | 1054               | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |

• Made in China • Made in Thailand



- Wide tread width offers more stable driving feel
- Extra deep tread for long tyre life and high pattern volume
- The zig-zag rib provide outstanding traction on regional application



• : Recommendable

AZ697

| Size    | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|         |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|         |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 7.00R15 | F/12    | 113/109L      | 12.0             | 5.50F        | 750                   | 200                | 1150                                          | 2535  | 670   | 97    | 1030 | 2270  | 670   | 97    |
| 6.50R16 | F/12    | 110/105L      | 11.0             | 5.50F        | 750                   | 185                | 1060                                          | 2336  | 670   | 97    | 925  | 2038  | 670   | 97    |
| 7.00R16 | G/14    | 118/114L      | 12.0             | 5.50F        | 200                   | 775                | 1320                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| 7.50R16 | G/14    | 122/118L      | 13.0             | 6.00G        | 215                   | 805                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| 8.25R16 | J/18    | 134/129K      | 14.0             | 6.50H        | 857                   | 235                | 2120                                          | 4675  | 850   | 123   | 1800 | 4080  | 850   | 123   |

• Made in China • Made in Thailand



- Improved closed shoulder helps to improved even wear resulting in long tread life
- Cross rib sipes slice through water for solid control on wet roads



• : Recommendable

CR907

| Size    | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|         |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|         |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 7.00R15 | F/12    | 113/109L      | 11.0             | 5.50F        | 750                   | 200                | 1150                                          | 2534  | 670   | 97    | 1030 | 2270  | 670   | 97    |
| 6.50R16 | F/12    | 110/105L      | 9.5              | 5.50F        | 750                   | 185                | 1060                                          | 2336  | 670   | 97    | 925  | 2038  | 670   | 97    |
| 7.00R16 | G/14    | 118/114L      | 11.0             | 5.50F        | 775                   | 200                | 1320                                          | 2908  | 770   | 111   | 1180 | 2600  | 770   | 111   |
| 7.50R16 | G/14    | 122/118L      | 12.0             | 6.00G        | 805                   | 215                | 1500                                          | 3305  | 770   | 111   | 1320 | 2909  | 770   | 111   |

• Made in China • Made in Thailand



- Tread pattern provides extended even wear and offers excellent wet traction
- Advanced compound promotes mileage before removal for long tyre life



• : Recommendable

CR950

| Size        | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|             |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|             |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 7.50R16     | G/14    | 122/118L      | 12.0             | 6.00G        | 805                   | 215                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| 8.25R16     | H/16    | 128/124L      | 14.0             | 6.50H        | 855                   | 235                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| 7.50R20     | G/14    | 130/128L      | 13.0             | 6.0          | 935                   | 215                | 1900                                          | 4190  | 830   | 120   | 1800 | 3970  | 830   | 120   |
| 8.25R20     | H/16    | 139/137K      | 14.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930   | 135   | 2300 | 5070  | 930   | 135   |
| 8.5R17.5    | F/12    | 121/120L      | 12.0             | 6.00         | 802                   | 215                | 1450                                          | 3200  | 625   | 91    | 1400 | 3090  | 625   | 91    |
| 9.5R17.5    | G/14    | 129/127L      | 13.0             | 6.75         | 842                   | 240                | 1850                                          | 4080  | 750   | 109   | 1750 | 3860  | 750   | 109   |
| 9.5R17.5    | H/16    | 143/141M      | 13.0             | 6.75         | 842                   | 240                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| 215/75R17.5 | H/16    | 135/133J      | 13.0             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| 8R22.5      | G/14    | 130/128M      | 13.5             | 6.00         | 935                   | 203                | 1900                                          | 4190  | 830   | 120   | 1800 | 3970  | 830   | 120   |
| 9R22.5      | G/14    | 136/134M      | 14.0             | 6.75         | 974                   | 229                | 2240                                          | 4940  | 830   | 120   | 2120 | 4675  | 830   | 120   |
| 10R22.5     | H/16    | 144/142M      | 15.0             | 7.50         | 1019                  | 254                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |

• Made in China • Made in Thailand





- Enhanced casing and deep tread guarantees longer mileage
- Strong biting edge and open shoulder produce powerful traction
- Stone rejector reduces stone retention and maximize casing durability
- Suitable for single axle vehicles



• : Recommendable

## AD756

| Size      | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|           |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|           |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| • 11R22.5 | G/14    | 144/142L      | 22.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| • 11R22.5 | H/16    | 148/145L      | 22.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| • 11R24.5 | G/14    | 146/143L      | 22.6             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| • 11R24.5 | H/16    | 149/146L      | 22.6             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

• Made in China



- Wide and deep tread enhances cost per mileage, driving stability and traction on highway application
- Aggressive traction blocks helps to increase wet traction
- Strong open shoulder produces powerful traction
- Suitable for single axle vehicles



• : Recommendable

## CM980

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| • 11R22.5     | G/14    | 144/142L      | 20.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| • 11R22.5     | H/16    | 148/145L      | 20.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| • 295/75R22.5 | G/14    | 144/141L      | 20.6             | 9.00         | 1020                  | 298                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |
| • 11R24.5     | G/14    | 146/143L      | 20.6             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| • 11R24.5     | H/16    | 149/146L      | 20.6             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |
| • 285/75R24.5 | G/14    | 144/141L      | 20.6             | 8.25         | 1056                  | 283                | 2800                                          | 6175  | 760   | 110   | 2575 | 5675  | 760   | 110   |

• Made in China • Made in Thailand



- Non-directional tread design for easy operating
- Open lug design helps provide traction in wet or snowy conditions



• : Recommendable

## CM987/CM987E/CM987PRO

| Size                    | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                         |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                         |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| • 8.25R16(CM987)        | H/16    | 128/124L      | 14.0             | 6.50H        | 855                   | 235                | 1800                                          | 3969  | 770   | 111   | 1600 | 3529  | 770   | 111   |
| • 9.00R16(CM987)        | G/14    | 131/126L      | 15.0             | 6.50H        | 900                   | 255                | 1950                                          | 4300  | 670   | 97    | 1700 | 3750  | 670   | 97    |
| • 8.25R20(CM987E)       | H/16    | 139/137K      | 19.0             | 6.5          | 974                   | 236                | 2430                                          | 5355  | 930   | 135   | 2300 | 5070  | 930   | 135   |
| • 9.00R20(CM987)        | H/16    | 144/142K      | 16.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| • 9.00R20(CM987E)       | H/16    | 144/142K      | 20.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| • 10.00R20(CM987)       | H/16    | 146/143K      | 17.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| • 10.00R20(CM987)       | J/18    | 149/146J      | 17.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| • 10.00R20(CM987E)      | J/18    | 149/146J      | 20.0             | 7.5          | 1054                  | 278                | 3250                                          | 7150  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| • 11.00R20(CM987)       | J/18    | 152/149K      | 18.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| • 11.00R20(CM987E)      | J/18    | 152/149K      | 22.0             | 8.0          | 1096                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| • 12.00R20(CM987)       | J/18    | 154/151K      | 19.0             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| • 12.00R20(CM987)       | L/20    | 156/153J      | 19.0             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |
| • 11R22.5(CM987)        | G/14    | 144/142L      | 20.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| • 11R22.5(CM987)        | H/16    | 148/145L      | 20.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| • 11R22.5(CM987)        | J/18    | 149/146L      | 20.6             | 8.25         | 1054                  | 279                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| • 12R22.5(CM987)        | J/18    | 152/149L      | 18.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| • 295/80R22.5(CM987PRO) | J/18    | 152/149L      | 19.5             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| • 11R24.5(CM987)        | G/14    | 146/143L      | 20.6             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| • 11R24.5(CM987)        | H/16    | 149/146L      | 20.6             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

• Made in China • Made in Thailand





- Traction block tread design for high drive wheel efficiency in all seasons
- Aggressive blading helps provide road-gripping traction
- Open shoulder produces powerful traction on wet and dry roads



● : Recommendable

CM986

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 245/70R17.5 | H/16    | 136/134M      | 15.0             | 7.50         | 789                   | 248                | 2240                                          | 4940  | 850   | 123   | 2120 | 4675  | 850   | 123   |
| ● 245/70R17.5 | J/18    | 143/141J      | 15.0             | 7.50         | 789                   | 248                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 205/75R17.5 | G/14    | 124/122M      | 14.0             | 6.00         | 753                   | 205                | 1600                                          | 3525  | 750   | 109   | 1500 | 3305  | 750   | 109   |
| ● 215/75R17.5 | H/16    | 135/133J      | 14.5             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| ● 225/75R17.5 | G/14    | 129/127M      | 14.5             | 6.75         | 783                   | 226                | 1850                                          | 4080  | 725   | 105   | 1750 | 3860  | 725   | 105   |
| ● 235/75R17.5 | G/14    | 132/130M      | 15.4             | 6.75         | 797                   | 233                | 2000                                          | 4410  | 775   | 112   | 1900 | 4190  | 775   | 112   |
| ● 235/75R17.5 | H/16    | 143/141J      | 15.4             | 6.75         | 797                   | 233                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 225/70R19.5 | F/12    | 125/123M      | 15.0             | 6.75         | 811                   | 226                | 1650                                          | 3640  | 660   | 95    | 1550 | 3415  | 660   | 95    |
| ● 245/70R19.5 | G/14    | 133/131M      | 15.4             | 7.50         | 839                   | 248                | 2060                                          | 4540  | 760   | 110   | 1950 | 4300  | 760   | 110   |
| ● 245/70R19.5 | H/16    | 136/134M      | 15.4             | 7.50         | 839                   | 248                | 2240                                          | 4940  | 830   | 120   | 2120 | 4675  | 830   | 120   |
| ● 285/70R19.5 | H/16    | 146/144K      | 16.0             | 8.25         | 895                   | 283                | 3000                                          | 6610  | 850   | 123   | 2800 | 6175  | 850   | 123   |

● Made in China    ● Made in Thailand



- Strong tyre carcass offers lateral durability for regional application
- Good damage protection and even wear profile feature outstanding performance in all conditions
- Excellent traction and good handling



● : Recommendable

AT560

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 385/65R22.5 | J/18    | 158L(160K)    | 16.0             | 11.75        | 1072                  | 389                | 4250                                          | 9370  | 850   | 125   | -    | -     | -     | -     |
| ● 385/65R22.5 | L/20    | 160K(158L)    | 16.0             | 11.75        | 1072                  | 389                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |
| ● 425/65R22.5 | L/20    | 165K          | 16.7             | 12.25        | 1124                  | 430                | 5150                                          | 11400 | 830   | 120   | -    | -     | -     | -     |
| ● 315/80R22.5 | J/18    | 154/151M      | 16.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5 | L/20    | 157/154K      | 16.0             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

● Made in China



- Strong tyre carcass offers lateral durability for regional application
- Micro tortuous pattern groove design, Horizontal shallow ditch design, Ensure tyre grip while reducing rolling resistance, Reduce fuel consumption, energy conservation and environmental protection
- Wide tread width offers more stable driving feel



● : Recommendable    ● : Available

AT532

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 385/65R22.5 | L/20    | 160K          | 15.5             | 11.75        | 1072                  | 389                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |

● Made in China    ● Made in Thailand



- High saturation pattern design, Improving tyre wear resistance, Significantly increase vehicle mileage
- Finite element simulation analysis, More uniform distribution of tyre contact pressure, improve uneven wear performance
- Special formula design, Greatly reduces rolling resistance



● : Recommendable    ● : Available

AT512

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 385/65R22.5 | L/20    | 160K          | 15.5             | 11.75        | 1072                  | 389                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |

● Made in Thailand





## MIXED SERVICE

Used both on and off road  
Heavy loads and outstanding durability  
Special protection against the damage caused by the road condition

# MIXED SERVICE

## ON & OFF



CR926/+B/D AT557 CM988 EZ573



CM998/+ EZ861 EZ865 EZ867 CM913 CM954 CM923 MD738 EZ356 EZ373



MD777 EZ591 MD726 EZ377 Pro EZ399 CB999 CB981 CB901 EZ372

## MINING



EZ870 EZ310 CB972 CB919 CB905 CB332 EZ330





# CR926+



● : Recommendable    ● : Available




Upgraded classic tyre for ON&OFF application with Longer mileage and Enhanced durability based on PSCT BTCT technology reduce deformation at the end of belt at high speed



3 circumferential grooves ensures good directional stability, even wear and smooth ride



Heavy siping provides good braking stability and high lateral traction on wet and dry surface



Sidewall reinforcing ribs protects against impacts and scuffing



| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|            |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 8.25R20  | H/16    | 139/137L      | 15.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930 135     | 2300 | 5070  | 930 135     |
| ● 9.00R20  | H/16    | 144/142K      | 15.5             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900 130     | 2650 | 5840  | 900 130     |
| ● 10.00R20 | H/16    | 146/143K      | 16.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830 120     | 2725 | 6005  | 830 120     |
| ● 10.00R20 | J/18    | 149/146J      | 16.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| ● 11.00R20 | J/18    | 152/149K      | 16.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| ● 12.00R20 | J/18    | 154/151K      | 17.5             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| ● 12.00R20 | L/20    | 156/153J      | 17.5             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900 131     | 3650 | 8050  | 900 131     |
| ● 11R22.5  | H/16    | 148/145L      | 15.5             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850 123     | 2900 | 6390  | 850 123     |
| ● 12R22.5  | J/18    | 152/149L      | 16.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930 135     | 3250 | 7160  | 930 135     |

● Made in China



## CR926 / CR926B / CR926D

| Size                       | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|----------------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|                            |         |                    |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|                            |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 6.50R16(CR926)           | F/12    | 110/105L           | 9.5              | 5.50F        | 750                   | 185                | 1060                                          | 2335  | 670 97      | 925  | 2040  | 670 97      |
| ● 7.00R16(CR926)           | G/14    | 118/114M           | 11.0             | 5.50F        | 775                   | 200                | 1320                                          | 2910  | 770 112     | 1180 | 2600  | 770 112     |
| ● 7.50R16(CR926)           | G/14    | 122/118L           | 12.0             | 6.00G        | 805                   | 215                | 1500                                          | 3305  | 770 112     | 1320 | 2910  | 770 112     |
| ● 7.50R20(CR926)           | G/14    | 130/128L           | 14.0             | 6.0          | 935                   | 215                | 1900                                          | 4190  | 830 120     | 1800 | 3970  | 830 120     |
| ● 8.25R16(CR926)           | G/14    | 126/122L           | 14.0             | 6.50H        | 855                   | 235                | 1700                                          | 3750  | 670 97      | 1500 | 3305  | 670 97      |
| ● 8.25R16(CR926)Reinforced | G/14    | 128/126L           | 14.0             | 6.50H        | 855                   | 235                | 1800                                          | 3970  | 670 97      | 1700 | 3750  | 670 97      |
| ● 8.25R20(CR926)           | H/16    | 139/137L           | 15.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930 135     | 2300 | 5070  | 930 135     |
| ● 9.00R20(CR926)           | H/16    | 144/142K           | 15.5             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900 130     | 2650 | 5840  | 900 130     |
| ● 10.00R20(CR926)          | H/16    | 146/143K           | 16.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830 120     | 2725 | 6005  | 830 120     |
| ● 10.00R20(CR926)          | J/18    | 149/146J           | 16.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| ● 11.00R20(CR926)          | J/18    | 152/149K           | 16.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| ● 12.00R20(CR926)          | J/18    | 154/151K           | 17.5             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| ● 12.00R20(CR926)          | L/20    | 156/153J           | 17.5             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900 131     | 3650 | 8050  | 900 131     |
| ● 12.00R24(CR926)          | L/20    | 160/157K           | 16.0             | 8.5          | 1226                  | 315                | 4500                                          | 9920  | 900 131     | 4125 | 9090  | 900 131     |
| ● 12.00R24(CR926B)         | L/20    | 160/157K           | 19.0             | 8.5          | 1226                  | 315                | 4500                                          | 9920  | 900 131     | 4125 | 9090  | 900 131     |
| ● 325/95R24(CR926B)        | M/22    | 162/160K           | 19.0             | 9.00         | 1228                  | 325                | 4750                                          | 10470 | 850 123     | 4500 | 9920  | 850 123     |
| ● 11R22.5(CR926D)          | G/14    | 144/142M           | 16.8             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720 105     | 2650 | 5840  | 720 105     |
| ● 11R22.5(CR926D)          | H/16    | 148/145M           | 16.8             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850 123     | 2900 | 6390  | 850 123     |
| ● 11R22.5(CR926D)          | J/18    | 149/146L           | 16.8             | 8.25         | 1054                  | 279                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| ● 12R22.5(CR926)           | J/18    | 152/149L           | 16.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930 135     | 3250 | 7160  | 930 135     |
| ● 13R22.5(CR926)           | J/18    | 156/151K           | 16.0             | 9.75         | 1124                  | 320                | 4000                                          | 8820  | 875 128     | 3450 | 7610  | 875 128     |
| ● 255/70R22.5(CR926D)      | H/16    | 140/137L           | 14.2             | 7.50         | 930                   | 255                | 2500                                          | 5510  | 830 120     | 2300 | 5070  | 830 120     |
| ● 295/80R22.5(CR926D)      | H/16    | 150/147M           | 16.0             | 9.00         | 1044                  | 298                | 3350                                          | 7390  | 830 120     | 3075 | 6780  | 830 120     |
| ● 295/80R22.5(CR926D)      | J/18    | 152/149L           | 16.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900 131     | 3250 | 7160  | 900 131     |
| ● 315/80R22.5(CR926B)      | J/18    | 154/151M(156/150L) | 16.5             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| ● 315/80R22.5(CR926B)      | L/20    | 157/154K           | 16.5             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900 130     | 3750 | 8270  | 900 130     |
| ● 11R24.5(CR926D)          | G/14    | 146/143L           | 16.8             | 8.25         | 1104                  | 279                | 3000                                          | 6610  | 720 105     | 2725 | 6005  | 720 105     |
| ● 11R24.5(CR926D)          | H/16    | 149/146L           | 16.8             | 8.25         | 1104                  | 279                | 3250                                          | 7160  | 830 120     | 3000 | 6610  | 830 120     |
| ● 12R24.5(CR926D)          | J/18    | 154/151L           | 17.0             | 9.00         | 1147                  | 300                | 3750                                          | 8270  | 930 135     | 3450 | 7610  | 930 135     |

● Made in China    ● Made in Thailand

- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing



● : Recommendable    ● : Available





- Aggressive multi-service, all position tread pattern promises excellent traction in ON/OFF road service
- Outstanding self-cleaning tread design ensures long-life service in ON/OFF road conditions
- Robust tread blocks and rugged casing allows for heavy loads and resist casing penetration and damage



● : Recommendable    ● : Available

## AT557

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 385/65R22.5 | J/18    | 158L(160K)         | 18.0             | 11.75        | 1072                  | 389                | 4250                                          | 9370  | 850   | 125   | -    | -     | -     | -     |
| ● 385/65R22.5 | L/20    | 160K(158L)         | 18.0             | 11.75        | 1072                  | 389                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |
| ● 425/65R22.5 | L/20    | 165K               | 18.0             | 12.25        | 1124                  | 430                | 5150                                          | 11400 | 830   | 120   | -    | -     | -     | -     |
| ● 445/65R22.5 | L/20    | 169K               | 18.0             | 13.00        | 1150                  | 444                | 5800                                          | 12775 | 900   | 130   | -    | -     | -     | -     |
| ● 265/70R19.5 | J/18    | 143/141J           | 16.5             | 7.50         | 867                   | 262                | 2725                                          | 6005  | 850   | 123   | 2575 | 5675  | 850   | 123   |
| ● 12R22.5     | J/18    | 152/149L           | 17.5             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 13R22.5     | J/18    | 156/151K           | 16.5             | 9.75         | 1124                  | 320                | 4000                                          | 8820  | 875   | 128   | 3450 | 7610  | 875   | 128   |
| ● 255/70R22.5 | H/16    | 140/137L           | 17.5             | 7.50         | 936                   | 255                | 2500                                          | 5510  | 830   | 120   | 2300 | 5070  | 830   | 120   |
| ● 275/70R22.5 | H/16    | 148/145L           | 18.0             | 8.25         | 958                   | 276                | 3150                                          | 6940  | 900   | 130   | 2900 | 6395  | 900   | 130   |
| ● 315/80R22.5 | J/18    | 154/151M(156/153L) | 17.5             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5 | L/20    | 157/154K           | 17.5             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |
| ● 315/80R22.5 | M/22    | 164/158K           | 17.5             | 9.00         | 1076                  | 312                | 5000                                          | 11000 | 950   | 138   | 4250 | 9370  | 950   | 138   |

● Made in China    ● Made in Thailand



- Increased tread width and depth promise longer mileage
- Stone rejection design reduces stone retention and maximize the casing durability
- Zig-zag rib groove ensure super traction on wet, dry and snow roads
- Scuff protection on sidewalls enhances resistance to lateral impacts and abrasion



● : Recommendable    ● : Available

## EZ573

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5     | H/16    | 148/145L      | 15.5             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5     | J/18    | 152/149L      | 9.0              | 16           | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 275/80R22.5 | H/16    | 149/146L      | 19.0             | 8.25         | 1012                  | 276                | 3250                                          | 7165  | 850   | 123   | 3000 | 6610  | 850   | 123   |
| ● 315/80R22.5 | L/20    | 157/154K      | 16.5             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |
| ● 12.00R24    | L/20    | 160/157K      | 16.0             | 8.5          | 1210                  | 305                | 4500                                          | 9920  | 900   | 131   | 4125 | 9090  | 900   | 131   |

● Made in China    ● Made in Thailand



- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads



● : Recommendable    ● : Available

## CM988


| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 7.00R16     | G/14    | 118/114L           | 14.0             | 5.50F        | 785                   | 200                | 1320                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| ● 7.50R16     | G/14    | 122/118L           | 15.5             | 6.00G        | 805                   | 215                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| ● 8.25R16     | H/16    | 128/124L           | 16.0             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| ● 8.25R20     | H/16    | 139/137K           | 15.5             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930   | 135   | 2300 | 5070  | 930   | 135   |
| ● 9.00R20     | H/16    | 144/142K           | 16.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| ● 10.00R20    | H/16    | 146/143K           | 15.5             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| ● 10.00R20    | J/18    | 149/146J           | 15.5             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 11.00R20    | J/18    | 152/149K           | 16.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 12.00R20    | J/18    | 154/151K           | 17.0             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 215/75R17.5 | H/16    | 135/133J           | 14.0             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| ● 235/75R17.5 | G/14    | 132/130M           | 15.0             | 6.75         | 797                   | 233                | 2000                                          | 4410  | 775   | 112   | 1900 | 4190  | 775   | 112   |
| ● 235/75R17.5 | H/16    | 143/141J           | 15.0             | 6.75         | 797                   | 233                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 11R22.5     | G/14    | 144/142L           | 18.5             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5     | H/16    | 148/145L           | 18.5             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5     | J/18    | 152/149L           | 18.0             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 295/80R22.5 | H/16    | 150/147L           | 18.5             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5 | J/18    | 152/149L           | 18.5             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5 | J/18    | 154/151M(156/153L) | 18.5             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5 | L/20    | 157/154K           | 18.5             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |
| ● 315/80R22.5 | M/22    | 164/158K           | 18.5             | 9.00         | 1082                  | 312                | 5000                                          | 11000 | 950   | 138   | 4250 | 9370  | 950   | 138   |
| ● 11R24.5     | G/14    | 146/143L           | 18.5             | 8.25         | 1104                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5     | H/16    | 149/146L           | 18.5             | 8.25         | 1104                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

● Made in China    ● Made in Thailand






# CM998+



Aggressive block design provides outstanding traction on rough roads



Wide tread and special tread compounds resist chipping, chunking, and tearing



Circumferential tie bar design increase the stiffness on the shoulder area



Upgraded classic tyre for on&off application with Longer mileage and Enhanced durability based on PSCT

Strong tyre casing offer lateral durability for longer tyre life



- Aggressive block design provides outstanding traction on rough roads
- Wide tread and special tread compounds resist chipping, chunking, and tearing
- Durable tyre casing for heavy loads
- Applicable for low speed use. Maximum speed shall be limited to 70 km/h in winter and 50 km/h in summer



● : Recommendable    ● : Available

## CM998

| Size     | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|          |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|          |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 7.00R16  | G/14    | 118/114L      | 15.5             | 5.50F        | 785                   | 200                | 1320                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| 7.50R16  | G/14    | 122/118L      | 16.0             | 6.00G        | 815                   | 215                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| 8.25R16  | G/14    | 128/126L      | 16.5             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 670   | 97    | 1700 | 3750  | 670   | 97    |
| 8.25R16  | H/16    | 128/124L      | 16.5             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| 8.25R20  | H/16    | 139/137K      | 16.5             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930   | 135   | 2300 | 5070  | 930   | 135   |
| 9.00R20  | H/16    | 144/142K      | 17.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| 10.00R20 | H/16    | 146/143K      | 18.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| 10.00R20 | J/18    | 149/146J      | 18.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| 11.00R20 | J/18    | 152/149J      | 19.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| 12.00R20 | J/18    | 154/151K      | 20.5             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| 12.00R20 | L/20    | 156/153J      | 20.5             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |

🇨🇳 Made in China    🇹🇭 Made in Thailand

| Size     | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|          |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|          |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 12.00R20 | J/18    | 154/151K      | 20.5             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| 12.00R20 | L/20    | 156/153J      | 20.5             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |

🇨🇳 Made in China





# EZ861




● : Recommendable    ● : Available



Brand new flagship tyre for on&off application with Less sidewall deformation and enhanced tyre life based on PSCT Cutting resistance compound helps resist chipping, chunking and tearing for a better mileage



Dual tie bars center block ensure the tyre stability in all driving conditions



Stone rejection design reduces stone retention and maximize casing durability



Optimized sipes distribution and open shoulder design improve the heat resistance performance

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|            |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 12.00R20 | J/18    | 154/151K      | 18.5             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 12.00R20 | L/20    | 156/153J      | 18.5             | 8.5          | 1136                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |

● Made in China



Brand new flagship tyre for on&off application with Less sidewall deformation and enhanced tyre life based on PSCT

Cutting resistance compound helps resist chipping, chunking and tearing for a better mileage




● : Recommendable    ● : Available


## EZ865

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|            |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 8.25R20  | H/16    | 139/137K      | 16.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930   | 135   | 2300 | 5070  | 930   | 135   |
| ● 9.00R20  | H/16    | 144/142K      | 16.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| ● 10.00R20 | J/18    | 149/146J      | 19.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 11.00R20 | J/18    | 152/149K      | 19.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 12.00R20 | J/18    | 154/151K      | 20.0             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 12.00R20 | L/20    | 156/153J      | 20.0             | 8.5          | 1136                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |
| ● 12R22.5  | J/18    | 152/149K      | 20.5             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |


● Made in China    ● Made in Thailand



Robust open shoulder provide outstanding traction and self-cleaning ability



Continuous center block pattern guarantee a stability driving in on&off road



Stone rejection design reduces stone retention and maximize casing durability





MIXED SERVICE  
ON & OFF

ZC-RUBBER TRUCK & BUS TYRE CATALOG

中策橡胶  
zc rubber


# EZ867




Brand new flagship tyre for on&off application with Less sidewall deformation and enhanced tyre life based on PSCT

Cutting resistance compound helps resist chipping, chunking and tearing for a better mileage

Width and high rubber volume tread design ensure a remarkable tyre life



Polygonal block pattern provides excellent traction performance on rough roads



Integrated tie bars prevents stone drilling and guarantee longer mileage



| Size     | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|----------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|          |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|          |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| 7.00R16  | G/14    | 118/114L      | 18.5             | 6.50H        | 865                   | 235                | 1800                                          | 2910  | 770 112     | 1180 | 2600  | 770 112     |
| 8.25R16  | H/16    | 128/124J      | 18.5             | 6.50H        | 235                   | 865                | 1800                                          | 3970  | 770 112     | 1600 | 3525  | 770 112     |
| 8.25R20  | H/16    | 139/137K      | 16.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930 135     | 2300 | 5070  | 930 135     |
| 9.00R20  | H/16    | 144/142K      | 18.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900 130     | 2650 | 5840  | 900 130     |
| 10.00R20 | J/18    | 149/146J      | 19.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| 11.00R20 | J/18    | 152/149K      | 22.0             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| 12.00R20 | J/18    | 154/151K      | 22.0             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| 12.00R20 | L/20    | 156/153J      | 22.0             | 8.5          | 1136                  | 315                | 4000                                          | 8820  | 900 131     | 3650 | 8050  | 900 131     |
| 12R22.5  | J/18    | 152/149K      | 22.0             | 9.00         | 1096                  | 300                | 3550                                          | 7830  | 930 135     | 3250 | 7160  | 930 135     |
| 13R22.5  | J/18    | 156/151K      | 22.0             | 9.75         | 1124                  | 320                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |

🇨🇳 Made in China 🇹🇭 Made in Thailand



- Drive axle tyre applicable for mud and sand terrain with short on high-way use
- Wide tread and open shoulder blocks help enhance traction and braking on rough roads with mud or gravel
- Special tread compounds resist chipping, chunking and tearing



## CM913/CM913A

| Size                | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|---------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|                     |         |                    |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|                     |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| 7.00R16(CM913)      | G/14    | 118/114L           | 16.0             | 6.00G        | 815                   | 215                | 1500                                          | 2910  | 770 112     | 1180 | 2600  | 770 112     |
| 8.25R20(CM913)      | H/16    | 139/137K           | 16.5             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930 135     | 2300 | 5070  | 930 135     |
| 9.00R20(CM913)      | H/16    | 144/142K           | 20.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900 130     | 2650 | 5840  | 900 130     |
| 10.00R20(CM913)     | H/16    | 146/143K           | 20.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830 120     | 2725 | 6005  | 830 120     |
| 10.00R20(CM913)     | J/18    | 149/146J           | 20.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| 11.00R20(CM913)     | J/18    | 152/149J           | 20.6             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| 11.00R20(CM913A)    | J/18    | 152/149K           | 18.6             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| 12.00R20(CM913)     | J/18    | 154/151K           | 22.0             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| 12.00R20(CM913)     | L/20    | 156/153J           | 22.0             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900 131     | 3650 | 8050  | 900 131     |
| 12.00R20(CM913A)    | J/18    | 154/151K           | 19.0             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| 12.00R20(CM913A)    | L/20    | 156/153J           | 19.0             | 8.5          | 1125                  | 315                | 4000                                          | 8820  | 900 131     | 3650 | 8050  | 900 131     |
| 12.00R24(CM913A)    | L/20    | 160/157K           | 19.0             | 8.5          | 1226                  | 315                | 4500                                          | 9920  | 900 131     | 4125 | 9090  | 900 131     |
| 325/95R24(CM913A)   | M/22    | 162/160K           | 19.0             | 9.00         | 1228                  | 325                | 4750                                          | 10470 | 850 123     | 4500 | 9920  | 850 123     |
| 12R22.5(CM913A)     | J/18    | 152/149L           | 20.6             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930 135     | 3250 | 7160  | 930 135     |
| 13R22.5(CM913A)     | J/18    | 156/151K           | 20.0             | 9.75         | 1124                  | 320                | 4000                                          | 8820  | 875 128     | 3450 | 7610  | 875 128     |
| 275/70R22.5(CM913A) | H/16    | 148/145/L          | 18.0             | 8.25         | 276                   | 964                | 3150                                          | 6940  | 900 130     | 2900 | 6395  | 900 130     |
| 315/80R22.5(CM913A) | J/18    | 154/151M(156/150L) | 19.0             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| 315/80R22.5(CM913A) | L/20    | 157/154K           | 19.0             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900 130     | 3750 | 8270  | 900 130     |

🇨🇳 Made in China 🇹🇭 Made in Thailand



- Continuous central design ensures driving stability and smooth ride
- The central siped zig-zag rib ensures even wear and grip on wet and muddy surface



## CM954

| Size        | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|-------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|             |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|             |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| 10.00R20    | H/16    | 146/143K      | 16.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830 120     | 2725 | 6005  | 830 120     |
| 11.00R20    | H/16    | 150/147K      | 15.0             | 8.0          | 1085                  | 293                | 3350                                          | 7390  | 830 120     | 3075 | 6780  | 830 120     |
| 11R22.5     | H/16    | 148/145M      | 16.0             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850 123     | 2900 | 6390  | 850 123     |
| 295/80R22.5 | J/18    | 152/149M      | 16.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900 131     | 3250 | 7160  | 900 131     |

🇨🇳 Made in China 🇹🇭 Made in Thailand





- Drive axle tyre applicable for rough road service
- Durable tyre casing and wide tread enhance tyre life
- Open lug design helps deliver super traction in wet and off-road conditions



## CM923

| Size        | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|             |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|             |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 13R22.5     | J/18    | 156/150K           | 20.0             | 9.75         | 1124                  | 320                | 4000                                          | 8820  | 875   | 128   | 3350 | 7390  | 875   | 128   |
| 315/80R22.5 | J/18    | 154/151M(156/150L) | 20.0             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| 315/80R22.5 | L/20    | 157/154K           | 20.0             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

🇨🇳 Made in China 🇹🇭 Made in Thailand



- Excellent traction for ON/OFF drive axle application
- Aggressive and optimum self-cleaning tread with lateral grooves provides remarkable performance in all weather conditions both one and off the roads



## MD738/MD738A

| Size               | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|--------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                    |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                    |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 9.5R17.5(MD738)    | G/14    | 129/127L      | 16.5             | 6.75         | 842                   | 240                | 1850                                          | 4080  | 750   | 109   | 1750 | 3860  | 750   | 109   |
| 9.5R17.5(MD738)    | H/16    | 143/141J      | 16.5             | 6.75         | 842                   | 240                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| 9.5R17.5(MD738A)   | G/14    | 129/127L      | 15.0             | 6.75         | 842                   | 240                | 1850                                          | 4080  | 750   | 109   | 1750 | 3860  | 750   | 109   |
| 9.5R17.5(MD738A)   | H/16    | 143/141J      | 15.0             | 6.75         | 842                   | 240                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| 215/75R17.5(MD738) | H/16    | 135/133J      | 15.0             | 6.00         | 767                   | 211                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| 235/75R17.5(MD738) | G/14    | 132/130M      | 16.0             | 6.75         | 797                   | 233                | 2000                                          | 4410  | 775   | 112   | 1900 | 4190  | 775   | 112   |
| 235/75R17.5(MD738) | H/16    | 143/141J      | 16.0             | 6.75         | 797                   | 233                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| 11R22.5(MD738)     | G/14    | 144/142L      | 20.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| 11R22.5(MD738)     | H/16    | 148/145L      | 20.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| 12R22.5(MD738)     | J/18    | 152/149L      | 20.6             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| 275/70R22.5(MD738) | H/16    | 148/145J      | 18.0             | 8.25         | 964                   | 276                | 3150                                          | 6940  | 900   | 130   | 2900 | 6395  | 900   | 130   |
| 295/80R22.5(MD738) | H/16    | 150/147L      | 20.6             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| 295/80R22.5(MD738) | J/18    | 152/149L      | 20.6             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| 11R24.5(MD738)     | G/14    | 146/143L      | 22.6             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| 11R24.5(MD738)     | H/16    | 149/146L      | 22.6             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

🇨🇳 Made in China 🇹🇭 Made in Thailand



- Applicable for drive axle on unpaved road
- Robust tread block provide outstanding traction on sand and mud road surface
- Special groove design with stone rejector prevent from stone penetration
- Durable tyre carcass and improved tread compound help to resist chipping and chunking for longer tyre life



## EZ356/EZ373

| Size               | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|--------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                    |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                    |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 425/65R22.5(EZ373) | L/20    | 165J          | 24.5             | 12.25        | 1124                  | 430                | 5150                                          | 11400 | 830   | 120   | -    | -     | -     | -     |
| 8.25R16(EZ356)     | H/16    | 128/124J      | 16.0             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| 10.00R20(EZ373)    | H/16    | 146/143K      | 19.0             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| 10.00R20(EZ373)    | J/18    | 149/146J      | 19.0             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| 12.00R20(EZ356)    | J/18    | 154/151F      | 24.0             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| 12.00R20(EZ356)    | L/20    | 156/153C      | 24.0             | 8.5          | 1136                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |
| 11R22.5(EZ373)     | G/14    | 144/142K      | 23.0             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| 11R22.5(EZ373)     | H/16    | 148/145K      | 23.0             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| 12R22.5(EZ373)     | J/18    | 152/149K      | 23.0             | 9.00         | 1096                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| 445/65R22.5(EZ573) | L/20    | 169K          | 24.5             | 13.00        | 1150                  | 365                | 5800                                          | 12775 | 900   | 130   | -    | -     | -     | -     |
| 11R24.5(EZ373)     | G/14    | 146/143L      | 23.0             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| 11R24.5(EZ373)     | H/16    | 149/146L      | 23.0             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

🇨🇳 Made in China 🇹🇭 Made in Thailand



- Premium tyre designed for drive position applicable for rough road surface
- Aggressive direction tread with robust tread blocks providing extra traction for on/off road condition
- Special rubber compound ensuring more resistance to cuts and tearing



## MD777

| Size        | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|             |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|             |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 12R22.5     | J/18    | 152/149L           | 23.0             | 9.00         | 1096                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| 13R22.5     | J/18    | 156/151K           | 23.0             | 9.75         | 1136                  | 320                | 4000                                          | 8820  | 875   | 128   | 3450 | 7610  | 875   | 128   |
| 315/70R22.5 | L/20    | 156/150K           | 21.0             | 9.00         | 1020                  | 312                | 4000                                          | 8820  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| 295/80R22.5 | J/18    | 152/149K           | 21.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| 315/80R22.5 | J/18    | 154/151L(156/150K) | 23.0             | 9.00         | 1082                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| 315/80R22.5 | L/20    | 157/154K           | 23.0             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |
| 315/80R22.5 | M/22    | 164/158K           | 23.0             | 9.00         | 1076                  | 312                | 5000                                          | 11000 | 950   | 138   | 4250 | 9370  | 950   | 138   |

🇨🇳 Made in China 🇹🇭 Made in Thailand





- High cost performance tyres suitable for mixed service application
- The consistent and sturdy pattern design at the center of the tread, Reduce tyre tread damage and improve tyre life
- The tread adopts a wear-resistant and cutting resistant formula, Improve the comprehensive performance of tyres



● : Recommendable    ● : Available

## EZ591

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5     | H/16    | 148/145K      | 19.5             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5     | J/18    | 152/149K      | 19.5             | 9.00         | 1085                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 295/80R22.5 | J/18    | 152/149J      | 21.0             | 9.00         | 1044                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/80R22.5 | L/20    | 157/154K      | 20.0             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

● Made in China



- Massive tread blocks and specific tread compound offer superb resistance against cuts and penetrations
- The tread adopts a wear-resistant and cutting resistant formula, Improve the comprehensive performance of tyres



● : Recommendable    ● : Available

## EZ377/EZ377 Pro

| Size                    | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                         |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                         |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 315/80R22.5(EZ377)    | M/22    | 164/158C      | 24.0             | 9.00         | 1082                  | 312                | 5000                                          | 11000 | 950   | 138   | 4250 | 9370  | 950   | 138   |
| ● 315/80R22.5(EZ377Pro) | M/22    | 164/158C      | 27.0             | 9.00         | 1082                  | 312                | 5000                                          | 11000 | 950   | 138   | 4250 | 9370  | 950   | 138   |

● Made in China



- High cost performance tires suitable for mixed service application
- The tread adopts a wear-resistant and cutting resistant formula, Improve the comprehensive performance of tires
- Aggressive direction tread with robust tread blocks providing extra traction for on/off road condition



● : Recommendable    ● : Available

## MD726

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 295/80R22.5 | J/18    | 152/149K      | 20.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |

● Made in China



- Massive tread blocks and specific tread compound offer superb resistance against cuts and penetrations
- The tread adopts a wear-resistant and cutting resistant formula, Improve the comprehensive performance of tires
- Open shoulder tread design improves self-cleaning capacity for ease of maintenance



● : Recommendable    ● : Available

## EZ399

| Size        | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|             |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|             |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 325/95R24 | M/22    | 162/160K      | 23.0             | 9.00         | 1228                  | 325                | 4750                                          | 10470 | 850   | 123   | 4500 | 9920  | 850   | 123   |

● Made in China





- Rugged tread blocks and tread design offer outstanding off-road traction
- Tough tread rubber compounds help resist chipping and chunking
- Enhanced traction in mud and sand



● : Recommendable  
● : Available

## CB999

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|            |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 7.50R16  | G/14    | 122/118M      | 15.0             | 6.00G        | 815                   | 215                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| ● 14.00R20 | J/18    | 161/158K      | 19.5             | 10.00        | 1240                  | 375                | 4625                                          | 10200 | 690   | 100   | 4250 | 9370  | 690   | 100   |
| ● 14.00R20 | L/20    | 164/161J      | 19.5             | 10.00        | 1240                  | 375                | 5000                                          | 11030 | 790   | 114   | 4625 | 10200 | 790   | 114   |

● Made in China



- Aggressive blocks provides outstanding traction on rough roads
- Suitable for all season and all position application on mud and sand terrain with some short on high-way use
- Cool-running compound enhances toughness casing



● : Recommendable  
● : Available

## CB901

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|            |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11.00R20 | J/18    | 152/149J      | 21.0             | 8.00         | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 12.00R20 | J/18    | 154/151F      | 22.0             | 8.50         | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |

● Made in China



- Continuous central design ensures driving stability and smooth ride
- The central siped zig-zag rib ensures even wear and grip on wet and muddy surface
- Enhanced durability over rough road with good on-road performance



● : Recommendable  
● : Available

## CB981

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|            |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 6.50R16  | G/14    | 110/105J      | 10.0             | 5.50F        | 750                   | 185                | 1060                                          | 2335  | 670   | 97    | 925  | 2040  | 670   | 97    |
| ● 7.00R16  | H/16    | 118/114J      | 14.0             | 5.50F        | 785                   | 200                | 1320                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| ● 7.50R16  | G/14    | 122/118L      | 16.0             | 6.00G        | 815                   | 215                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| ● 8.25R16  | G/14    | 128/126L      | 16.5             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 670   | 97    | 1700 | 3750  | 670   | 97    |
| ● 8.25R16  | H/16    | 128/124L      | 16.5             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| ● 8.25R20  | H/16    | 139/137K      | 17.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930   | 135   | 2300 | 5070  | 930   | 135   |
| ● 9.00R20  | H/16    | 144/142K      | 18.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| ● 10.00R20 | H/16    | 146/143K      | 19.5             | 7.5          | 1054                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| ● 10.00R20 | J/18    | 149/146J      | 19.5             | 7.5          | 1054                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 11.00R20 | J/18    | 152/149J      | 20.5             | 8.0          | 1085                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 12.00R20 | J/18    | 154/151K      | 20.5             | 8.5          | 1125                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 11R22.5  | G/14    | 144/142L      | 19.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5  | H/16    | 148/145L      | 19.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |

● Made in China    ● Made in Thailand



- Premium logging tyres applicable for all seasons including winter season
- Large and strong tread blocks with deep tread (32/32nd) guarantee exceptional traction on snow and mud road surface
- Durable tyre casing and improved rubber compound provide excellent tyre life and resist chipping and chunking



● : Recommendable

## EZ372

| Size      | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|           |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|           |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5 | G/14    | 144/142J      | 25.4             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5 | H/16    | 148/145J      | 25.4             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 11R24.5 | G/14    | 146/143J      | 25.4             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5 | H/16    | 149/146J      | 25.4             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

● Made in China    ● Made in Thailand






# EZ870



● : Recommendable



Super robust block provide outstanding traction on off road surface



Center tie bar design minimize longitudinal elongation and deformation



Stone ejector platforms prevent tread damage from stone drilling



Brand new flagship tyre for mining application with Enhanced tyre life and durability based on PSCT

Special mining compound helps resist chipping, chunking and tearing for a better mileage

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|            |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 6.50R16  | F/12    | 110/105F      | 13.5             | 5.50F        | 185                   | 750                | 1060                                          | 2335  | 670   | 97    | 925  | 2040  | 670   | 97    |
| ● 7.00R16  | G/14    | 118/114F      | 19.0             | 6.50H        | 865                   | 235                | 1800                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| ● 7.50R16  | G/14    | 122/118F      | 16.5             | 6.00G        | 215                   | 815                | 1500                                          | 3305  | 770   | 112   | 1320 | 2910  | 770   | 112   |
| ● 8.25R16  | H/16    | 128/124F      | 19.0             | 6.50H        | 235                   | 865                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| ● 9.00R20  | H/16    | 144/142F      | 24.5             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| ● 10.00R20 | J/18    | 149/146D      | 25.0             | 7.5          | 1065                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 11.00R20 | J/18    | 152/149D      | 24.5             | 8.0          | 1096                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 12.00R20 | J/18    | 154/151F      | 25.5             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 12.00R20 | L/20    | 156/153F      | 25.5             | 8.5          | 1136                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |
| ● 12R22.5  | J/18    | 152/149F      | 24.5             | 9.00         | 1096                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 13R22.5  | J/18    | 156/151D      | 25.5             | 9.75         | 1136                  | 320                | 4000                                          | 8820  | 875   | 128   | 3450 | 7610  | 875   | 128   |

● Made in China    ● Made in Thailand



Brand new flagship tyre for mining application with Enhanced tyre life and durability based on PSCT  
Special mining compound helps resist chipping, chunking and tearing for a better mileage

- Super robust block provide outstanding traction on off road surface
- Centre tie bar design minimise longitudinal elongation and deformation
- Stone ejector platforms prevent tread damage from stone drilling



● : Recommendable



## EZ310

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|            |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 12.00R20 | L/20    | 156/153B      | 25.5             | 8.5          | 1136                  | 315                | 4000                                          | 8820  | 900   | 131   | 3650 | 8050  | 900   | 131   |

● Made in China



- Aggressive lug design with large blocks at tread center provides excellent traction and braking on rough roads with mud or gravel and is self-cleaning for ease of maintenance
- Applicable in mining, logging, construction or rock and quarry operations with some very short on high-way use possible
- Special tread compounds resist chipping and chunking in rugged off-road conditions



● : Recommendable  
● : Available

## CB972/CB972E

| Size                 | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                      |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                      |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 8.25R16(CB972)     | H/16    | 128/124J      | 18.0             | 6.50H        | 865                   | 225                | 1800                                          | 3970  | 770   | 112   | 1600 | 3525  | 770   | 112   |
| ● 215/75R17.5(CB972) | H/16    | 135/133G      | 15.0             | 6.00         | 769                   | 216                | 2180                                          | 4805  | 850   | 123   | 2060 | 4540  | 850   | 123   |
| ● 225/80R17.5(CB972) | J/18    | 132/129G      | 17.0             | 6.75         | 811                   | 226                | 2000                                          | 4410  | 850   | 123   | 1850 | 4080  | 850   | 123   |
| ● 235/75R17.5(CB972) | H/16    | 143/141G      | 17.0             | 6.75         | 799                   | 242                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 9.00R20(CB972)     | H/16    | 144/142F      | 22.0             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900   | 130   | 2650 | 5840  | 900   | 130   |
| ● 10.00R20(CB972)    | H/16    | 146/143F      | 24.0             | 7.5          | 1065                  | 278                | 3000                                          | 6610  | 830   | 120   | 2725 | 6005  | 830   | 120   |
| ● 10.00R20(CB972)    | J/18    | 149/146F      | 24.0             | 7.5          | 1065                  | 278                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| ● 11.00R20(CB972)    | J/18    | 152/149F      | 24.5             | 8.0          | 1096                  | 293                | 3550                                          | 7825  | 930   | 135   | 3250 | 7165  | 930   | 135   |
| ● 12.00R20(CB972)    | J/18    | 154/151F      | 25.5             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 12.00R24(CB972)    | L/20    | 160/157C      | 25.0             | 8.5          | 1226                  | 315                | 4500                                          | 9920  | 900   | 131   | 4125 | 9090  | 900   | 131   |
| ● 12.00R24(CB972E)   | L/20    | 160/157C      | 32.0             | 8.5          | 1238                  | 315                | 4500                                          | 9920  | 900   | 131   | 4125 | 9090  | 900   | 131   |
| ● 325/95R24(CB972E)  | M/22    | 162/160D      | 32.0             | 9.00         | 1228                  | 325                | 4750                                          | 10470 | 850   | 123   | 4500 | 9920  | 850   | 123   |
| ● 11R22.5(CB972)     | G/14    | 144/142G      | 23.0             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| ● 11R22.5(CB972)     | H/16    | 148/145J      | 23.0             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 12R22.5(CB972)     | J/18    | 152/149F      | 24.5             | 9.00         | 1096                  | 300                | 3550                                          | 7830  | 930   | 135   | 3250 | 7160  | 930   | 135   |
| ● 275/70R22.5(CB972) | H/16    | 148/145J      | 20.0             | 8.25         | 964                   | 276                | 3150                                          | 6940  | 900   | 130   | 2900 | 6395  | 900   | 130   |
| ● 295/80R22.5(CB972) | H/16    | 150/147K      | 21.0             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| ● 295/80R22.5(CB972) | J/18    | 152/149J      | 21.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 11R24.5(CB972)     | G/14    | 146/143F      | 23.0             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| ● 11R24.5(CB972)     | H/16    | 149/146F      | 23.0             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

● Made in China    ● Made in Thailand





- Aggressive lug design with large block at tread center designed for mining, rock and quarry operations
- Wide tread and special tread compounds resist chipping, chunking, and tearing
- Stone rejector platform prevents trapped stones from punching deeper and piecing belt



● : Recommendable

## CB919

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|               |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 10.00R20    | H/16    | 146/143F      | 23.5             | 7.5          | 1065                  | 278                | 3000                                          | 6610  | 830 120     | 2725 | 6005  | 830 120     |
| ● 10.00R20    | J/18    | 149/146F      | 23.5             | 7.5          | 1065                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| ● 11.00R20    | J/18    | 152/149F      | 25.5             | 8.0          | 1096                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| ● 12.00R20    | J/18    | 154/151F      | 25.5             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| ● 12.00R20    | M/22    | 158/155C      | 25.5             | 8.5          | 1136                  | 315                | 4250                                          | 9370  | 970 141     | 3875 | 8540  | 970 141     |
| ● 12.00R24    | L/20    | 160/157C      | 32.0             | 8.5          | 1238                  | 315                | 4500                                          | 9920  | 900 131     | 4125 | 9090  | 900 131     |
| ● 11R22.5     | G/14    | 144/142G      | 23.0             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720 105     | 2650 | 5840  | 720 105     |
| ● 11R22.5     | H/16    | 148/145J      | 23.0             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850 123     | 2900 | 6390  | 850 123     |
| ● 12R22.5     | J/18    | 152/149F      | 23.5             | 9.00         | 1096                  | 300                | 3550                                          | 7830  | 930 135     | 3250 | 7160  | 930 135     |
| ● 13R22.5     | J/18    | 156/151F      | 24.0             | 9.75         | 1136                  | 320                | 4000                                          | 8820  | 875 128     | 3450 | 7610  | 875 128     |
| ● 295/80R22.5 | H/16    | 150/147K      | 21.0             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830 120     | 3075 | 6780  | 830 120     |
| ● 295/80R22.5 | J/18    | 152/149J      | 21.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900 131     | 3250 | 7160  | 900 131     |

● Made in China    ● Made in Thailand



- Aggressive blocks provides outstanding traction on rough roads
- Suitable for all season and all position application on mud and sand terrain with some short on high-way use
- Cool-running compound enhances toughness casing



● : Recommendable

## CB905

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|               |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 8.25R16     | H/16    | 128/124J      | 16.5             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 770 112     | 1600 | 3525  | 770 112     |
| ● 10.00R20    | H/16    | 146/143F      | 24.0             | 7.5          | 1065                  | 278                | 3000                                          | 6610  | 830 120     | 2725 | 6005  | 830 120     |
| ● 10.00R20    | J/18    | 149/146D      | 24.0             | 7.5          | 1065                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| ● 11.00R20    | J/18    | 152/149D      | 24.5             | 8.0          | 1096                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| ● 12.00R20    | J/18    | 154/151D      | 24.5             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| ● 295/80R22.5 | H/16    | 150/147G      | 21.0             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830 120     | 3075 | 6780  | 830 120     |
| ● 295/80R22.5 | J/18    | 152/149F      | 21.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900 131     | 3250 | 7160  | 900 131     |

● Made in China    ● Made in Thailand



- Special tread compounds resist chipping and chunking in rugged off-road conditions
- Robust tread block help promote traction and floatation capacity on rough roads
- Applicable for low speed mining service



● : Recommendable

## CB332

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|            |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 7.00R16  | G/14    | 118/114J      | 18.0             | 5.50F        | 785                   | 200                | 1320                                          | 2910  | 770 112     | 1180 | 2600  | 770 112     |
| ● 7.50R16  | G/14    | 122/118J      | 18.0             | 6.00G        | 815                   | 215                | 1500                                          | 3305  | 770 112     | 1320 | 2910  | 770 112     |
| ● 8.25R16  | H/16    | 128/124J      | 16.5             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 770 112     | 1600 | 3525  | 770 112     |
| ● 8.25R20  | H/16    | 139/137E      | 19.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930 135     | 2300 | 5070  | 930 135     |
| ● 9.00R20  | H/16    | 144/142D      | 20.5             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900 130     | 2650 | 5840  | 900 130     |
| ● 10.00R20 | J/18    | 149/146D      | 23.5             | 7.5          | 1065                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| ● 11.00R20 | J/18    | 152/149D      | 24.5             | 8.0          | 1096                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| ● 12.00R20 | J/18    | 154/151D      | 25.5             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |
| ● 12.00R24 | L/20    | 160/157C      | 25.5             | 8.5          | 1226                  | 315                | 4500                                          | 9920  | 900 131     | 4125 | 9090  | 900 131     |

● Made in China    ● Made in Thailand



- Special tread compounds resist chipping and chunking in rugged off-road conditions
- Robust tread block help promote traction and floatation capacity on rough roads
- Applicable for low speed mining service



● : Recommendable

## EZ330

| Size       | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |             |      |       |             |
|------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------------|------|-------|-------------|
|            |         |               |                  |              |                       |                    | Single                                        |       |             | Dual |       |             |
|            |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) (psi) | (kg) | (lbs) | (kPa) (psi) |
| ● 7.00R16  | G/14    | 118/114J      | 18.0             | 5.50F        | 785                   | 200                | 1320                                          | 2910  | 770 112     | 1180 | 2600  | 770 112     |
| ● 7.50R16  | G/14    | 122/118J      | 18.0             | 6.00G        | 815                   | 215                | 1500                                          | 3305  | 770 112     | 1320 | 2910  | 770 112     |
| ● 8.25R16  | H/16    | 128/124J      | 16.5             | 6.50H        | 865                   | 235                | 1800                                          | 3970  | 770 112     | 1600 | 3525  | 770 112     |
| ● 8.25R20  | H/16    | 139/137E      | 19.0             | 6.5          | 974                   | 236                | 2430                                          | 5360  | 930 135     | 2300 | 5070  | 930 135     |
| ● 9.00R20  | H/16    | 144/142D      | 20.5             | 7.0          | 1019                  | 259                | 2800                                          | 6175  | 900 130     | 2650 | 5840  | 900 130     |
| ● 10.00R20 | J/18    | 149/146D      | 23.5             | 7.5          | 1065                  | 278                | 3250                                          | 7160  | 930 135     | 3000 | 6610  | 930 135     |
| ● 11.00R20 | J/18    | 152/149D      | 24.5             | 8.0          | 1096                  | 293                | 3550                                          | 7825  | 930 135     | 3250 | 7165  | 930 135     |
| ● 12.00R20 | J/18    | 154/151D      | 25.5             | 8.5          | 1136                  | 315                | 3750                                          | 8270  | 830 120     | 3450 | 7610  | 830 120     |

● Made in China





## URBAN

Frequent speed changes and turning  
Resistance to curb impact  
Excellent road grip and durable high mileage



## STEER/TRAILER



CR906II

AZ675

AZ687

## DRIVE



MD703





- Four rib tread pattern provides uniform wear and excellent traction on wet and dry road.
- Deep and wide tread enhances mileage for exceptionally long tyre life
- Reinforced shoulder and steel sidewall help deliver long casing life and retreadability
- Sidewall protector ribs help resist sidewall damage from turning, backing and braking when used in urban neighborhoods.
- Cool-running compound delivers low rolling resistance meaning more fuel efficiency



● : Recommendable

## CR906/CR906II

| Size                 | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|----------------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|                      |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|                      |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 11R22.5(CR906II)     | H/16    | 148/145J           | 21.0             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| 11R22.5(CR906II)     | J/18    | 149/146J           | 21.0             | 8.25         | 1065                  | 279                | 3250                                          | 7160  | 930   | 135   | 3000 | 6610  | 930   | 135   |
| 255/70R22.5(CR906)   | H/16    | 140/137J           | 17.5             | 7.50         | 936                   | 255                | 2500                                          | 5510  | 830   | 120   | 2300 | 5070  | 830   | 120   |
| 275/70R22.5(CR906II) | H/16    | 148/145J(152/148F) | 21.0             | 8.25         | 964                   | 276                | 3150                                          | 6940  | 900   | 130   | 2900 | 6395  | 900   | 130   |
| 275/80R22.5(CR906)   | H/16    | 149/146J           | 19.0             | 8.25         | 1012                  | 276                | 3250                                          | 7165  | 850   | 123   | 3000 | 6610  | 850   | 123   |
| 295/80R22.5(CR906)   | H/16    | 150/147M           | 19.0             | 9.00         | 1050                  | 298                | 3350                                          | 7390  | 830   | 120   | 3075 | 6780  | 830   | 120   |
| 295/80R22.5(CR906)   | J/18    | 152/149L           | 19.0             | 9.00         | 1050                  | 298                | 3550                                          | 7830  | 900   | 131   | 3250 | 7160  | 900   | 131   |

● Made in China    ● Made in Thailand



- Excellent sidewall protection minimizes scuff damage from turning and braking
- Extra deep tread for long tyre life and high pattern volume
- The zig-zag rib provide outstanding traction on city bus application



● : Recommendable

## AZ675

| Size        | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|             |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|             |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 305/70R22.5 | L/20    | 153/150J      | 19.0             | 9.00         | 1018                  | 317                | 3650                                          | 8050  | 900   | 130   | 3350 | 7390  | 900   | 130   |

● Made in China



- Deep tread depth and optimised rib width ensures outstanding mileage performance
- Zig-zag groove provides excellent traction and braking
- 3D siping helps improved traction and even wear.
- Excellent sidewall protection minimizes scuff damage from turning and braking



● : Recommendable

## AZ687

| Size    | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|         |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|         |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 11R22.5 | G/14    | 144/142J      | 20.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| 11R22.5 | H/16    | 148/145J      | 20.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |

● Made in China



- Extra deep tread for long tyre life with excellent retreadability
- Zigzag main grooves provide improved traction and braking performance
- Excellent sidewall protection minimizes scuff damage from turning and braking



● : Recommendable

## MD703

| Size    | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|         |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|         |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 11R22.5 | G/14    | 144/142J      | 20.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| 11R22.5 | H/16    | 148/145J      | 20.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |

● Made in China



## WINTER

Contribute to safety and operating in winter conditions  
Outstanding grip performance on ice and snow road surface  
Stable handling during braking and turning



## STEER/TRAILER



NS785

NZ780

NZ782

NZ787

NZ788

## DRIVE



ND783

IceTrac N2





WINTER

ZC-RUBBER TRUCK & BUS TYRE CATALOG



- Wide and deep circumferential grooves enhances removal of snow and ice
- Specific tread compound keep rubber softness in low temperature with good performance
- Wide tread with advanced block and sipe design provides extra traction for snow and ice road conditions



● : Recommendable

NS785

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 225/80R17.5 | H/16    | 123/122L           | 15.0             | 6.75         | 811                   | 226                | 1550                                          | 3415  | 700   | 102   | 1500 | 3305  | 700   | 102   |
| ● 225/70R19.5 | G/14    | 128/126M           | 16.0             | 6.75         | 811                   | 226                | 1800                                          | 3970  | 760   | 110   | 1700 | 3750  | 760   | 110   |
| ● 245/70R19.5 | H/16    | 136/134J           | 18.5             | 7.50         | 845                   | 248                | 2240                                          | 4940  | 830   | 120   | 2120 | 4675  | 830   | 120   |
| ● 265/70R19.5 | H/16    | 140/138J           | 19.5             | 7.50         | 867                   | 262                | 2500                                          | 5510  | 775   | 112   | 2360 | 5200  | 775   | 112   |
| ● 385/55R22.5 | L/20    | 160K(158L)         | 15.0             | 12.25        | 996                   | 386                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |
| ● 385/65R22.5 | L/20    | 160K               | 15.0             | 11.75        | 1070                  | 394                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |
| ● 295/80R22.5 | J/18    | 154/149L           | 18.0             | 9.00         | 1050                  | 298                | 3750                                          | 8270  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/70R22.5 | L/20    | 156/150K(152/148L) | 17.0             | 9.00         | 1020                  | 312                | 4000                                          | 8820  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| ● 315/80R22.5 | J/18    | 154/151M(156/153L) | 18.0             | 9.00         | 1076                  | 312                | 3750                                          | 8270  | 830   | 120   | 3450 | 7610  | 830   | 120   |
| ● 315/80R22.5 | L/20    | 157/154K           | 18.0             | 9.00         | 1076                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

● Made in China ● Made in Thailand



- Wide open shoulder deliver additional traction without compromising tread life
- Specific tread compound keep rubber softness in low temperature with good performance
- Studable tread design provides extra traction for snow and ice road conditions



● : Recommendable

ND783

| Size          | LR / PR | Service index      | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|--------------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |                    |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |                    |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 295/80R22.5 | J/18    | 154/149L           | 21.0             | 9.00         | 1050                  | 298                | 3750                                          | 8270  | 900   | 131   | 3250 | 7160  | 900   | 131   |
| ● 315/70R22.5 | L/20    | 154/150K(152/148L) | 19.0             | 9.00         | 1020                  | 312                | 3750                                          | 8250  | 900   | 130   | 3350 | 7390  | 900   | 130   |
| ● 315/80R22.5 | J/18    | 156/153K(154/151L) | 21.0             | 9.00         | 1082                  | 312                | 4000                                          | 8820  | 850   | 123   | 3650 | 8050  | 850   | 123   |
| ● 315/80R22.5 | L/20    | 157/154J           | 21.0             | 9.00         | 1082                  | 312                | 4125                                          | 9090  | 900   | 130   | 3750 | 8270  | 900   | 130   |

● Made in Thailand

NEW



- Wide open shoulder deliver additional traction without compromising tread life
- Specific tread compound keep rubber softness in low temperature with good performance
- Studable tread design provides extra traction for snow and ice road conditions



● : Recommendable

IceTrac N2

| Size      | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-----------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|           |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|           |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 11R22.5 | H/16    | 148/145L      | 19.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| ● 11R24.5 | H/16    | 149/146L      | 19.6             | 8.25         | 1104                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

● Made in China



- Strong biting edges guarantee excellent traction on dry and slippery road surface, especially in winter
- Specific tread compound offer good mileage without scarifying wet traction
- Wide open shoulder deliver additional traction without compromising tread life



● : Recommendable

NZ780

| Size          | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|               |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|               |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| ● 6.50R16     | F/12    | 110/105L      | 13.5             | 5.50F        | 750                   | 185                | 1060                                          | 2335  | 670   | 97    | 925  | 2040  | 670   | 97    |
| ● 7.00R16     | G/14    | 118/114L      | 14.0             | 5.50F        | 785                   | 200                | 1320                                          | 2910  | 770   | 112   | 1180 | 2600  | 770   | 112   |
| ● 235/75R17.5 | G/14    | 143/141J      | 16.0             | 6.75         | 797                   | 242                | 2725                                          | 6005  | 875   | 128   | 2575 | 5675  | 875   | 128   |
| ● 225/70R19.5 | G/14    | 128/126N      | 16.0             | 6.75         | 226                   | 811                | 1800                                          | 3970  | 760   | 110   | 1700 | 3750  | 760   | 110   |

● Made in China



WINTER

ZC-RUBBER TRUCK & BUS TYRE CATALOG



- Strong biting edges guarantee excellent traction on dry and slippery road surface, especially in winter
- Specific tread compound offer good mileage without scarifying wet traction
- Wide open shoulder deliver additional traction without compromising tread life



● : Recommendable    ● : Available

NZ782

| Size    | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|---------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|         |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|         |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 11R22.5 | G/14    | 144/142L      | 19.6             | 8.25         | 1054                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| 11R22.5 | H/16    | 148/145L      | 19.6             | 8.25         | 1054                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| 11R24.5 | G/14    | 146/143L      | 20.6             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| 11R24.5 | H/16    | 149/146L      | 20.6             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |

● Made in China    ● Made in Thailand



- Wide tread provide stability while improving handling on wet and snowy road
- Extra deep tread depth provide long original tread life
- Open shoulder grooves deliver additional traction without compromising tread life
- 3D siping provide excellent traction and braking



● : Recommendable    ● : Available

NZ788

| Size        | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|             |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|             |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 11R22.5     | G/14    | 144/142L      | 21.6             | 8.25         | 1065                  | 279                | 2800                                          | 6175  | 720   | 105   | 2650 | 5840  | 720   | 105   |
| 11R22.5     | H/16    | 148/145L      | 21.6             | 8.25         | 1065                  | 279                | 3150                                          | 6940  | 850   | 123   | 2900 | 6390  | 850   | 123   |
| 11R24.5     | G/14    | 146/143L      | 21.6             | 8.25         | 1116                  | 279                | 3000                                          | 6610  | 720   | 105   | 2725 | 6005  | 720   | 105   |
| 11R24.5     | H/16    | 149/146L      | 21.6             | 8.25         | 1116                  | 279                | 3250                                          | 7160  | 830   | 120   | 3000 | 6610  | 830   | 120   |
| 275/80R22.5 | J/18    | 149/146L      | 20               | 8.25         | 1012                  | 276                | 3250                                          | 7165  | 850   | 123   | 3000 | 6610  | 850   | 123   |

● Made in China    ● Made in Thailand



- New trailer winter tyre for severe weather conditions
- Maximized snow and ice grip with special tread compound and CAD tread pattern



● : Recommendable    ● : Available

NZ787

| Size        | LR / PR | Service index | Tread Depth (mm) | Standard Rim | Overall Diameter (mm) | Section Width (mm) | Max. Load Capacity at Cold Inflation Pressure |       |       |       |      |       |       |       |
|-------------|---------|---------------|------------------|--------------|-----------------------|--------------------|-----------------------------------------------|-------|-------|-------|------|-------|-------|-------|
|             |         |               |                  |              |                       |                    | Single                                        |       |       |       | Dual |       |       |       |
|             |         |               |                  |              |                       |                    | (kg)                                          | (lbs) | (kPa) | (psi) | (kg) | (lbs) | (kPa) | (psi) |
| 385/55R22.5 | J/18    | 158L          | 16.0             | 11.75        | 1070                  | 394                | 4250                                          | 9370  | 850   | 125   | -    | -     | -     | -     |
| 385/65R22.5 | L/20    | 160K          | 16.0             | 11.75        | 1070                  | 394                | 4500                                          | 9920  | 900   | 130   | -    | -     | -     | -     |

● Made in Thailand





**ZHONGCE RUBBER GROUP CO., LTD.**



[zc-rubber.com](http://zc-rubber.com)



[facebook.com/zcrubber](https://facebook.com/zcrubber)



[twitter.com/zc\\_rubber](https://twitter.com/zc_rubber)



[linkedin.com/company/zcrubber](https://linkedin.com/company/zcrubber)